

## Quarry Tile

Summitville Quarry Tile is extruded to provide uniform density, strength and rugged performance in high-traffic areas. Precision ground edges provide controlled sizing, clean straight lines and full flush joints.

Quarry Tile is resistant to acids, oils, detergents and is fire-proof, fade-proof and dent-proof. It's natural unglazed surface is easy to maintain and retains its good looks year after year. Unglazed precision ground Quarry Tile is resistant to stains but not stain proof. Light colors tend to show staining more than dark colors or Red Quarry Tile.

Care should be taken when using colored grouts or when tile will be exposed to oil, grease or other harsh staining agents. We do not recommend light Quarry Tile colors in commercial kitchens unless properly sealed. Summitville offers a complete line of sealants and other tile care products. Visit our web site for more detailed information.

[www.summitville.com](http://www.summitville.com)

All colors are available in smooth or abrasive surface. Some colors are priced higher than others.

Quarry Tile colors are available in 6" x 6" x 1/2" and 4" x 8" x 1/2" Size 8" x 8" x 1/2" is available in colors 10, 11, 33, and 44 only. Color number 10 Summitville Red is also available in 6" x 6" and 6" x 9", both 3/4" thick.

## OLDE TOWNE QUARRY

Olde Towne Quarry has all of the same natural qualities as Quarry Tile except the edge is cushioned not precision ground and available in one size only, 6" x 6" x 1/2". Nine colors are standard the same as Quarry Tile.

All colors are available in smooth or abrasive surface. Wire cut surface is available by special order, minimum quantity required. Always check factory, inventory may be available.

Visit our web site for detailed specifications.

### PRICE GROUP I

10 SUMMITVILLE RED *Range of deep red shades.*

### PRICE GROUP II

10 SUMMITVILLE RED FLASHED

*Range of deep red shades with dark flashing.*

11 SUN GLO FLASHED

*Range of light golden tan shades with dark flashing.*

### PRICE GROUP III

11 SUN GLO *Range of light golden tan shades.*

33 FALCON *Range of medium warm tan-gray shades.*

48 MOROCCAN BROWN *Range of deep red brown shades.*

66 PALOMINO *Range of light yellow beige shades.*

### \* PRICE GROUP IV

44 OXFORD GRAY *Range of medium green-gray shades.*

86 ELEPHANT GRAY *Range of dark gray shades.*

\* Group IV are Premium-priced colors.

## Contoured Tiles


Two shapes are offered in, standard color, 10 Red only, designed for a 3/8" joint; Flemish 6" x 6" x 1/2" and Hex 8" x 3/4". Custom colors are special order, minimum quantity required. Check with factory, inventory may be available.

Abrasive surface available in all sizes. Flashed, double abrasive and waxing are by special order.



# SPEC CERAMICS, INC.

[SpecCeramics.com](http://SpecCeramics.com) | [info@specceramics.com](mailto:info@specceramics.com) | 800 449 7732

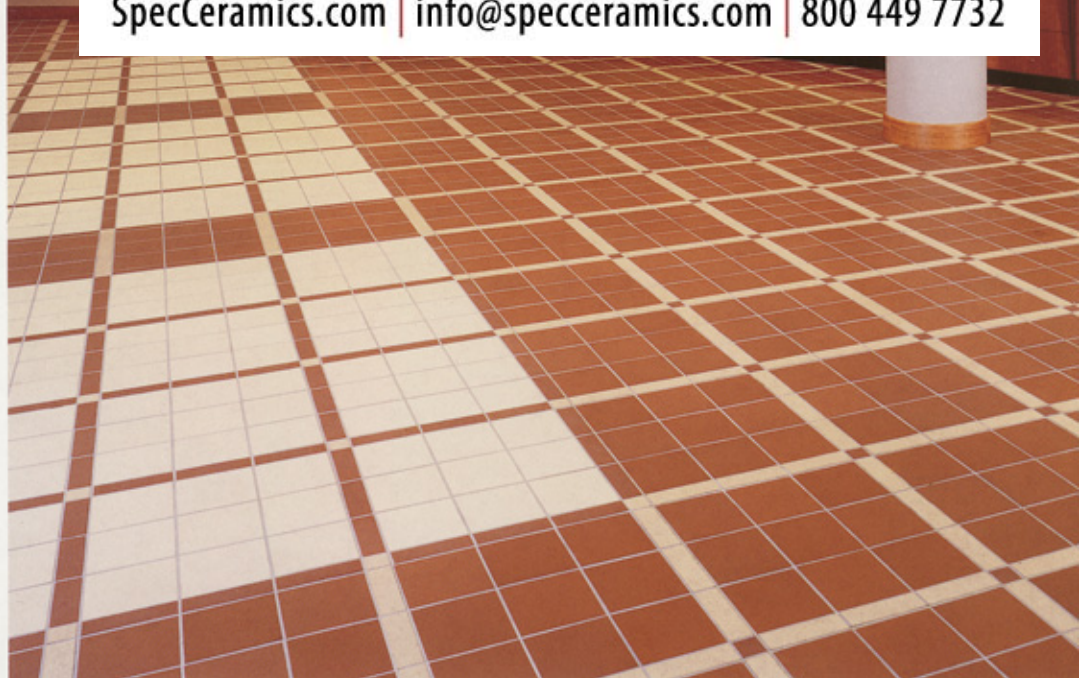

10 Summitville Red




11 Sun Glo



\*44 Oxford Gray



48 Moroccan Brown



10 Summitville Red Flashed



11 Sun Glo Flashed



33 Falcon



66 Palomino

### NOMINAL SIZES/SHAPES



6" x 6" x 1/2"



4" x 8" x 1/2"




6" x 6" x 3/4"  
10 Red Only



8" x 8" x 1/2"



6" x 9" x 3/4"  
10 Red Only



\*86 Elephant Gray



Flemish  
6" x 6" x 1/2"



Hex, 8" x 3/4"  
Plain or Flashed


### STATIC COEFFICIENT OF FRICTION RANGES

Smooth  
Dry 0.70 to 0.95 Wet 0.60 to 0.90  
Abrasive  
Dry 0.80 to 1.0 Wet 0.70 to 0.95

## QUARRY TILE & OLDE TOWNE TRIM

\*3/4" QUARRY TILE, DOUBLE BULLNOSE, SQUARE TOP  
COVE BASE AVAILABLE #10 RED ONLY.

\*STAIR TREAD / SILLS

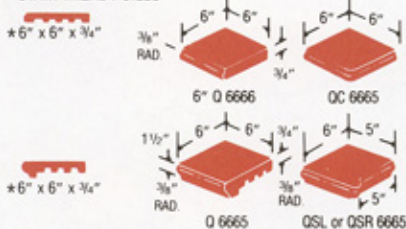

1. Q 6666 series are flat surface units.
2. Q 6665 series is a lip bullnose for concealing setting bed. In combination with standard tile and cove base units, there is unlimited flexibility for sill, stair tread and riser dimensions.

BULLNOSE



6 x 6 x 1/2	Q 1665	QC 1665
*6 x 6 x 3/4	*Q 1660	*QC 1660
3/4 x 8 x 1/2	Q 1485	QCL/QCR 1485
8 x 3/4 x 1/2	Q 1845	QCL/QCR 1485
8 x 8 x 1/2	Q 1885	QC 1885

BULLNOSE CORNERS



QC 1665
*QC 1660
QCL/QCR 1485
QCL/QCR 1485
QC 1885

\*DOUBLE BULLNOSE

DOUBLE BULLNOSE CORNERS



6 x 6 1/2	Q 7665	QC 7665	QK 7665	QKC 7665
-----------	--------	---------	---------	----------

\*COVE BASE (Square Top)

COVE CORNERS (Square Top)



5 x 6 x 1/2	Q 3566	QB 3566	QCL or QCR 3566
5 x 6 x 3/4	Q 3561	QB 3561	QCL or QCR 3561




COVE BASE (Round Top)

COVE CORNERS (Round Top)



5 x 6 x 1/2	Q 3565	QB 3565	QC 3565	QCL or QCR 3565
5 x 6 x 3/4	Q 3560	QB 3560	QCL or QCR 3560	
5 x 8 x 1/2	Q 3585	QB 3585	QC 3585	

## STRATA TRIM

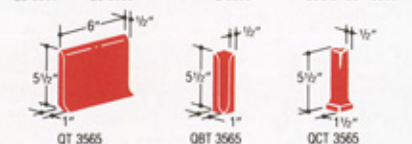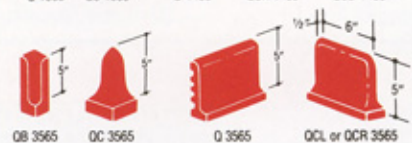

## A Word About Coefficient of Friction and Slip Resistance

Static coefficient of friction tests are performed according to ASTM test method C 1028-96. There is no ANSI Standard for slip resistance. OSHA recommends a static C.O.F. of .50 minimum for dry surfaces. ADA recommends, on dry surfaces, a 0.60 for accessible routes and 0.80 for ramp surfaces.

There are no ADA requirements for slip resistance. Static C.O.F. should be only one method to help you determine slip resistance. Other factors can affect slip resistance, such as degree of wear on the shoe and flooring material; presence of foreign material such as water, oil and dirt; the length of human stride at the time of slip; type of floor finish and the physical and mental condition of humans. Therefore, this test method should be used for the sole purpose of developing a property of the flooring surface under laboratory conditions, and should not be used to determine slip resistance under field conditions unless these conditions are fully described.

Static C.O.F. can vary from piece to piece with each production run and from production run to production run.

