

Justify



SPEC CERAMICS, INC.
specceramics.com

9" X 59"



VISTA POINT OAK
COADM9O5MM-19



RUNNING OAK
COSTE9O5MM-19



HIGHWAY OAK
COCAM9O5MM-19




RONAN OAK
COROH9O5MM-19



ROUTE 66 OAK
COFAL9O5MM-19



CHANDLER OAK
COCHA9O5MM-19

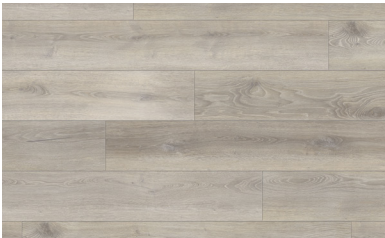

GUARDRAIL OAK
COKIN9O5MM-19




SECRET PASSAGE OAK
COROY9O5MM-19

7" X 59"



STATELY OAK
COIMP7O5MM-18

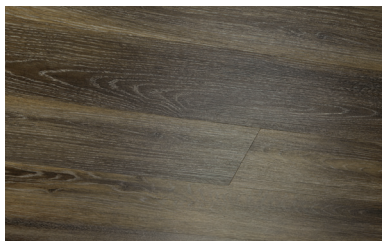

SCENIC ROUTE OAK
COPAL7O5MM-18




MAJESTIC HICKORY
COMON7H5MM-18



LADY HICKORY
COBAR7H5MM-18




TUNNEL PINE
COCHE7P5MM-18

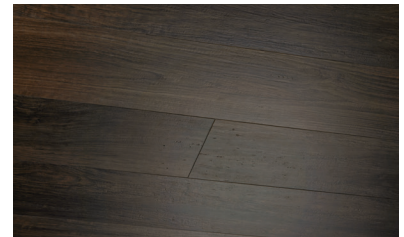

MAPLE TEAK
COMAR7T5MM-18



LANDMARK MAPLE
COESQ7M5MM-18

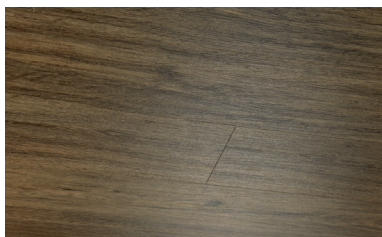

ROYAL OAK
COSOV7O5MM-18

Benefits

Finish:	Anti Bacterial & Fungal Control Commercially Rated Wear Layer 100% Renewable with Warranty Intact Lifetime Finish Warranty
Structure:	Higher Stability & Density 100% Quality Virgin Vinyl Purcore Rigid Plus - Lifetime Structure Warranty
Clean Air:	Formaldehyde Free Ortho Phthalate Free 100% Floor Score Certified

Features

Dimensions:	9" x 59" x 5.5mm 7" x 59" x 5.5mm
Wear Layer:	20mil (.5mm)
Surface Texture:	Various
Finish:	Surface Guardian Pro®
Edge Detail:	4 Sided Painted Bevel 9" x 59" Pressed Bevel [7" x 59"]
Certified:	FloorScore®
Usage:	Residential, Commercial
Warranty:	Limited Lifetime Residential finish Limited Lifetime Residential structural 10 year commercial finish 20 year commercial structural

ASTM

Flexibility	Pass	ASTM F137
Thickness Standard	Pass	ASTM F386
Resistance to Chemicals (5 min.)	Pass	ASTM F925
Resistance to Chemicals (24 hr.)	Pass	ASTM F925
Heat Stability by Color Change	Pass	ASTM F1514
Light Stability by Color Change	Pass	ASTM F1515
Dimensional Stability after exposure to heat	Pass	ASTM F219
Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Short Term Indentation	Pass (PSI Equivalent > 5,500+ lbs.)	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected * E1 Rating	EN 7171-1
Impact Insulation Class IIC	Eternity Underlayment IIC 71 Delta 21	ASTM E492, E-989

ISO 14001 Certified Environmental Management System
GREENGUARD Certified | UL2818 - 2013 Gold Standard



Certified FloorScore: Independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3

Justify



WATERPROOF


PRINTED TOP LAYER

Natural Low Sheen
High Definition Printing
Beautiful Wood Visuals
Wide and Long Planks - 59"
4 Sided Painted Bevel
[9" x 59"]
Pressed Bevel
[7" x 59"]

ATTACHED ACOUSTIC PAD

Sound Transmission Reduction
Comfort for Feet and Back
Waterproof & Hypoallergenic

EZ Loc INSTALLATION SYSTEM
(Higher Locking Integrity)

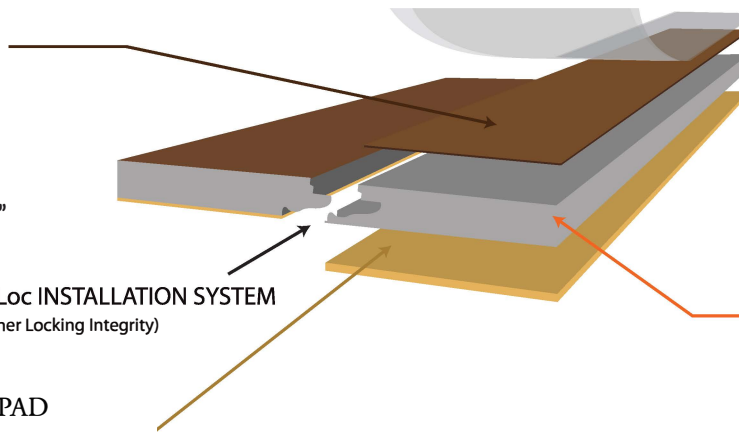

SURFACE GUARDIAN PRO PROTECTION

Commercial Rated 20mil Wear Layer
UV Ceramic Bead Protection
Inhibits Bacteria
Authentic Wood Embossed Texture - EIR
Stain Resistant

PURCORE RIGID CONSTRUCTION

PurCore Rigid Technology
Pure Virgin Vinyl & 60% Stone
3 Season Room Compatible
Durable Surface & Dent Resistant
Formaldehyde Free - Ortho Phthalate Free



Commercial Rated Finish



Inhibits Bacteria



Certified Healthy

Healthy Indoor Air Quality