
TERRAZZO BELLA

Italian Inspired Porcelain Tile Made in USA



www.specceramics.com



SpecCeramics
A&D Hard Surface Choice
100% Employee Owned

TIMELESS DESIGN FOR ANY PROJECT





**CRAFTED FOR
EVERY CORNER OF
YOUR PROJECT
EVEN OUTDOOR**

R11 (grip finish)
available only in size
**24x48 in the
following colors:**

Seashell
Cementi
Milano
Classico



SUSTAINABLE & ECO-FRIENDLY CHOICES

Color choices ranging from day to night and everything in between. There is a project out there for each of these 10 colors.



MINT CHIP

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24, 24x24, 24x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

PISMO

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24, 24x24, 24x48 &

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte



LAKE BED

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24, 24x24, 24x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

SUSTAINABLE & ECO-FRIENDLY CHOICES



SEASHELL

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48 &
48x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte


CLASSICO

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48 &
48x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

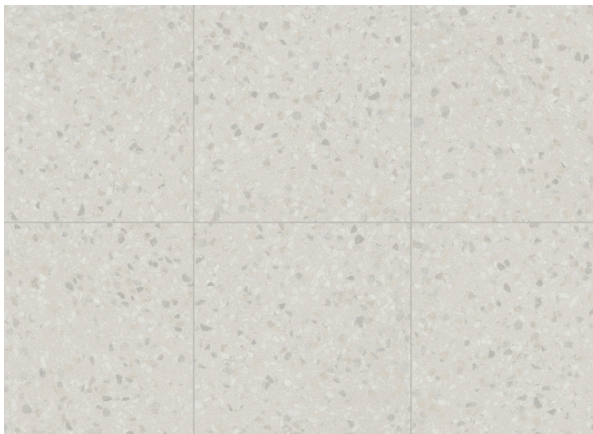

CEMENTI

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48 &
48x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

SUSTAINABLE & ECO-FRIENDLY CHOICES



GREY MATTER

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

MILANO

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48 &
48x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte



RIVER WASH


Materials: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte

SUSTAINABLE & ECO-FRIENDLY CHOICES

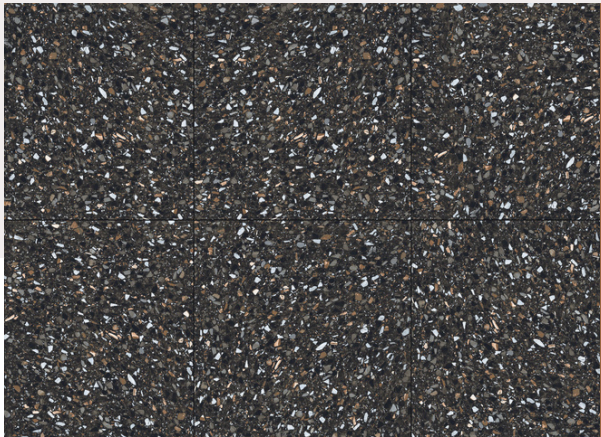

LAVA

Material: Porcelain Tile

Dimensions: 4x4, 4x24, 12x24,
24x24, 24x48

Trim: 6x12 cove base & 3x12 bullnose

Finishing: Matte



SUSTAINABLE & ECO-FRIENDLY CHOICES



X DECO

Material: Porcelain Mosaic

Dimensions: 12x12


Finishing: Matte

SNAKE DECO

Material: Porcelain Mosaic

Dimensions: 10.5x17

Finishing: Matte

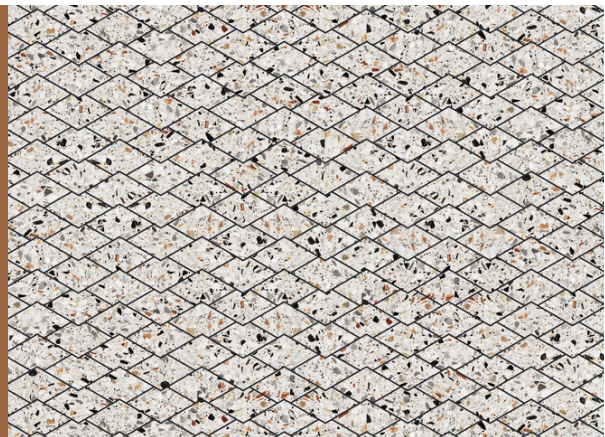

MOSAIC CLASSICO

Materials: Porcelain Mosaic

Dimensions: 12x12 (2x2)

Finishing: Matte

ESSENTIAL SLAB PRE FAB 32 X 96



CEMENTI

PRE-FAB 32"x96"
12 mm

PRE-FAB 32"x96"
Sharknose 12 mm

PRE-FAB 25.5"x96"
L-Shaped Top 12 mm

MILANO

PRE-FAB 32"x96"
12 mm

PRE-FAB 32"x96"
Sharknose 12 mm

PRE-FAB 25.5"x96"
L-Shaped Top 12 mm

SEASHELL

PRE-FAB 32"x96"
12 mm

PRE-FAB 32"x96"
Sharknose 12 mm

PRE-FAB 25.5"x96"
L-Shaped Top 12 mm

CLASSICO

PRE-FAB 32"x96"
12 mm

PRE-FAB 32"x96"
Sharknose 12 mm

PRE-FAB 25.5"x96"
L-Shaped Top 12 mm



SLEEK & MODERN DESIGNS FOR A FRESH LOOK

Shapes and patterns are the defining element to signature design. You can create your own terrazzo masterpiece that will truly inspire others.



Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.
Este producto cumple o excede todos los estándares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C137.8	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	Compliant	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	Compliant	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	Compliant	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	Compliant	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	Compliant	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	Compliant	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Tile Designs that Define Your Style



**Your Space,
Your Style, Your
Signature**

REACH US HERE:



+800.449.SPEC (7732)



info@specceramics.com



3855 E La Palma

Anaheim, CA 92807