


**Mutina**

# **Mutina America**

**Curated domestic stock Program  
for the US Market**

# About Mutina

For over ten years, Mutina has been promoting an enhancement process of the ceramic matter that combines design and art, in a course of experimentation and mutual contamination. Working side by side with designers, architects and artists, observing them, supporting them has always been the driving force of the company. The resulting exchange – creative, design-driven, human – has a fundamental impact on all the projects that come to life in Mutina, whether it is a collection of ceramic wall tiles, a group exhibition of contemporary art or a collaboration on a large-scale architectural project.

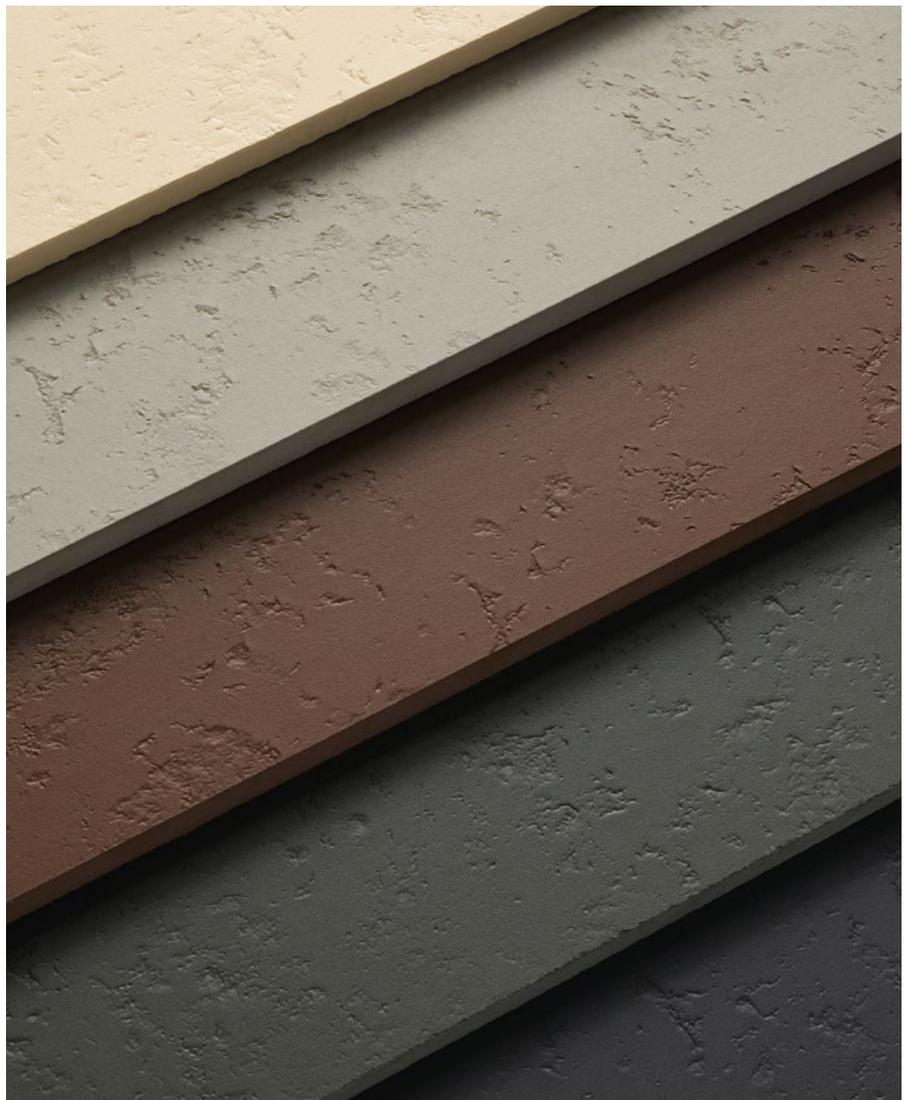


# Mutina America

## **Stock to support Brand Partners**

Mutina America Stock includes some of the best sellers worldwide. Brand Partners can support quick sales on these items now also from a local domestic source. Mutina America gets even closer to the Brand Partners.

## **Curated domestic stock program for the US Market**

The Mutina America Program includes floor and wall combinations that can be designed as a single item design or a combination of various items. The purpose is to have a “ready-easy-to-go” Program for multiple spaces in the home. We suggest combinations of the different materials to enhance the possibilities within a domestically stocked Program.

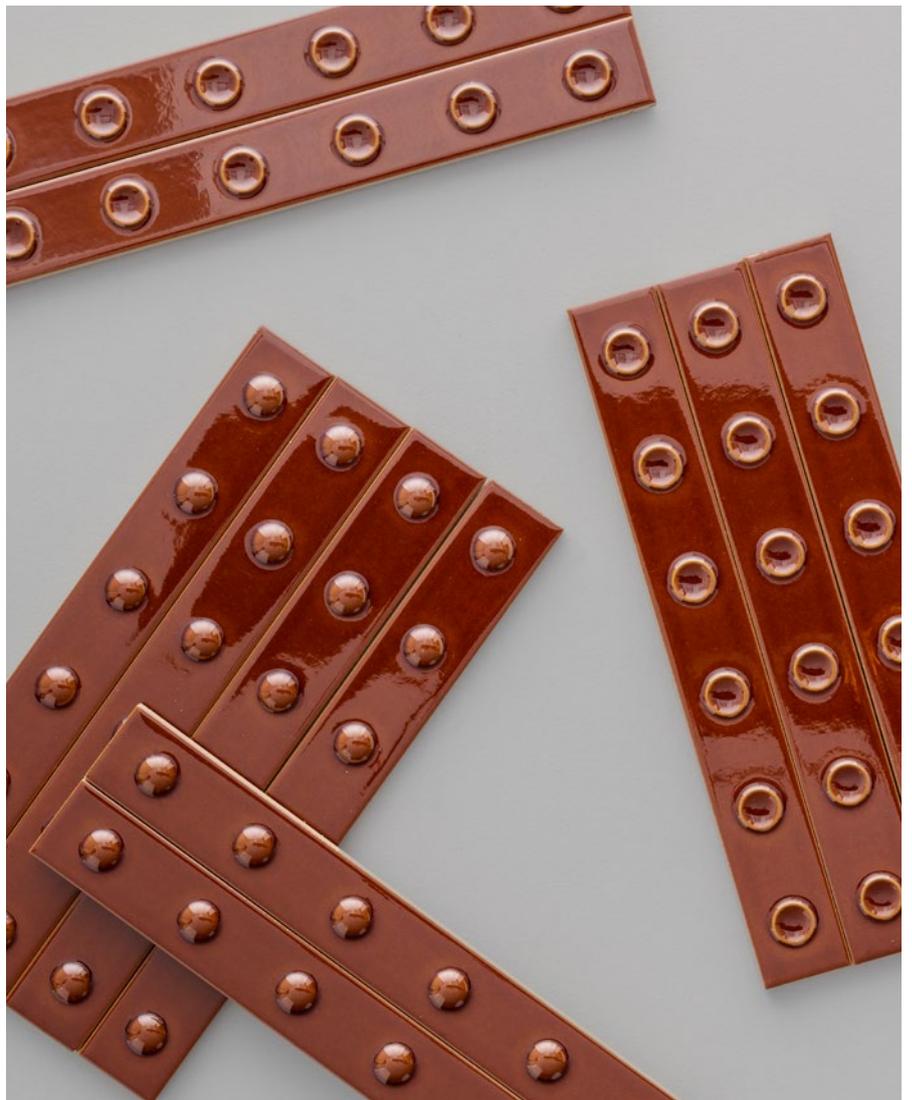

# Collections

## **Kosei**

Vincent Van Duysen

## **Phenomenon**

Tokujiin Yoshioka

## **Punto**


Ronan & Erwan Bouroullec

## **Rombini**

Ronan & Erwan Bouroullec


# Kosei

## Vincent Van Duysen

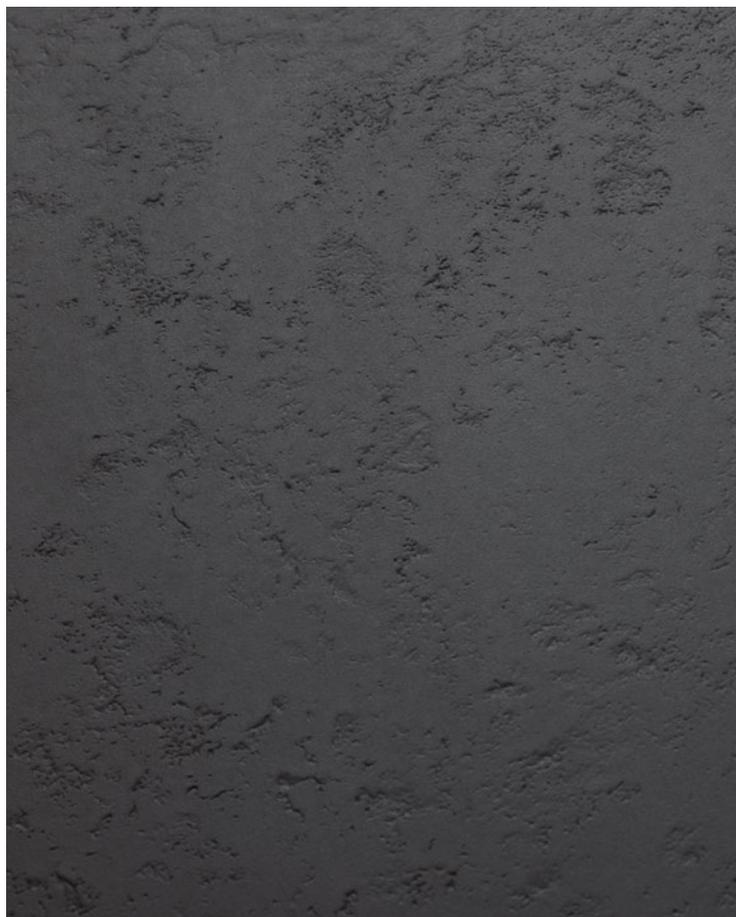


With Kosei – which means composition in Japanese – Vincent Van Duysen proposes a range of ceramic surfaces developed with pure and tactile materials, inspired by lava rocks such as obsidian and volcanic glasses, which are homogeneous, amorphous and with exceptional hardness. The end result is a timeless design conceived for “grand” architecture, featuring a colour palette of 5 shades that can be combined for a progressively decorative taste. Kosei has been specifi-


cally conceived for floors, both indoors and outdoors. The collection range presents a 24”x24” format, with a soft texture, and the Chevron module, available in size 4”x22”, that has been created to lend depth to surfaces. The elements allow to design elegant matt surfaces, also by alternating the available colours – Bone, Storm, Terra, Grey Green and Dark Grey –, creating different harmonious yet dynamic compositions.

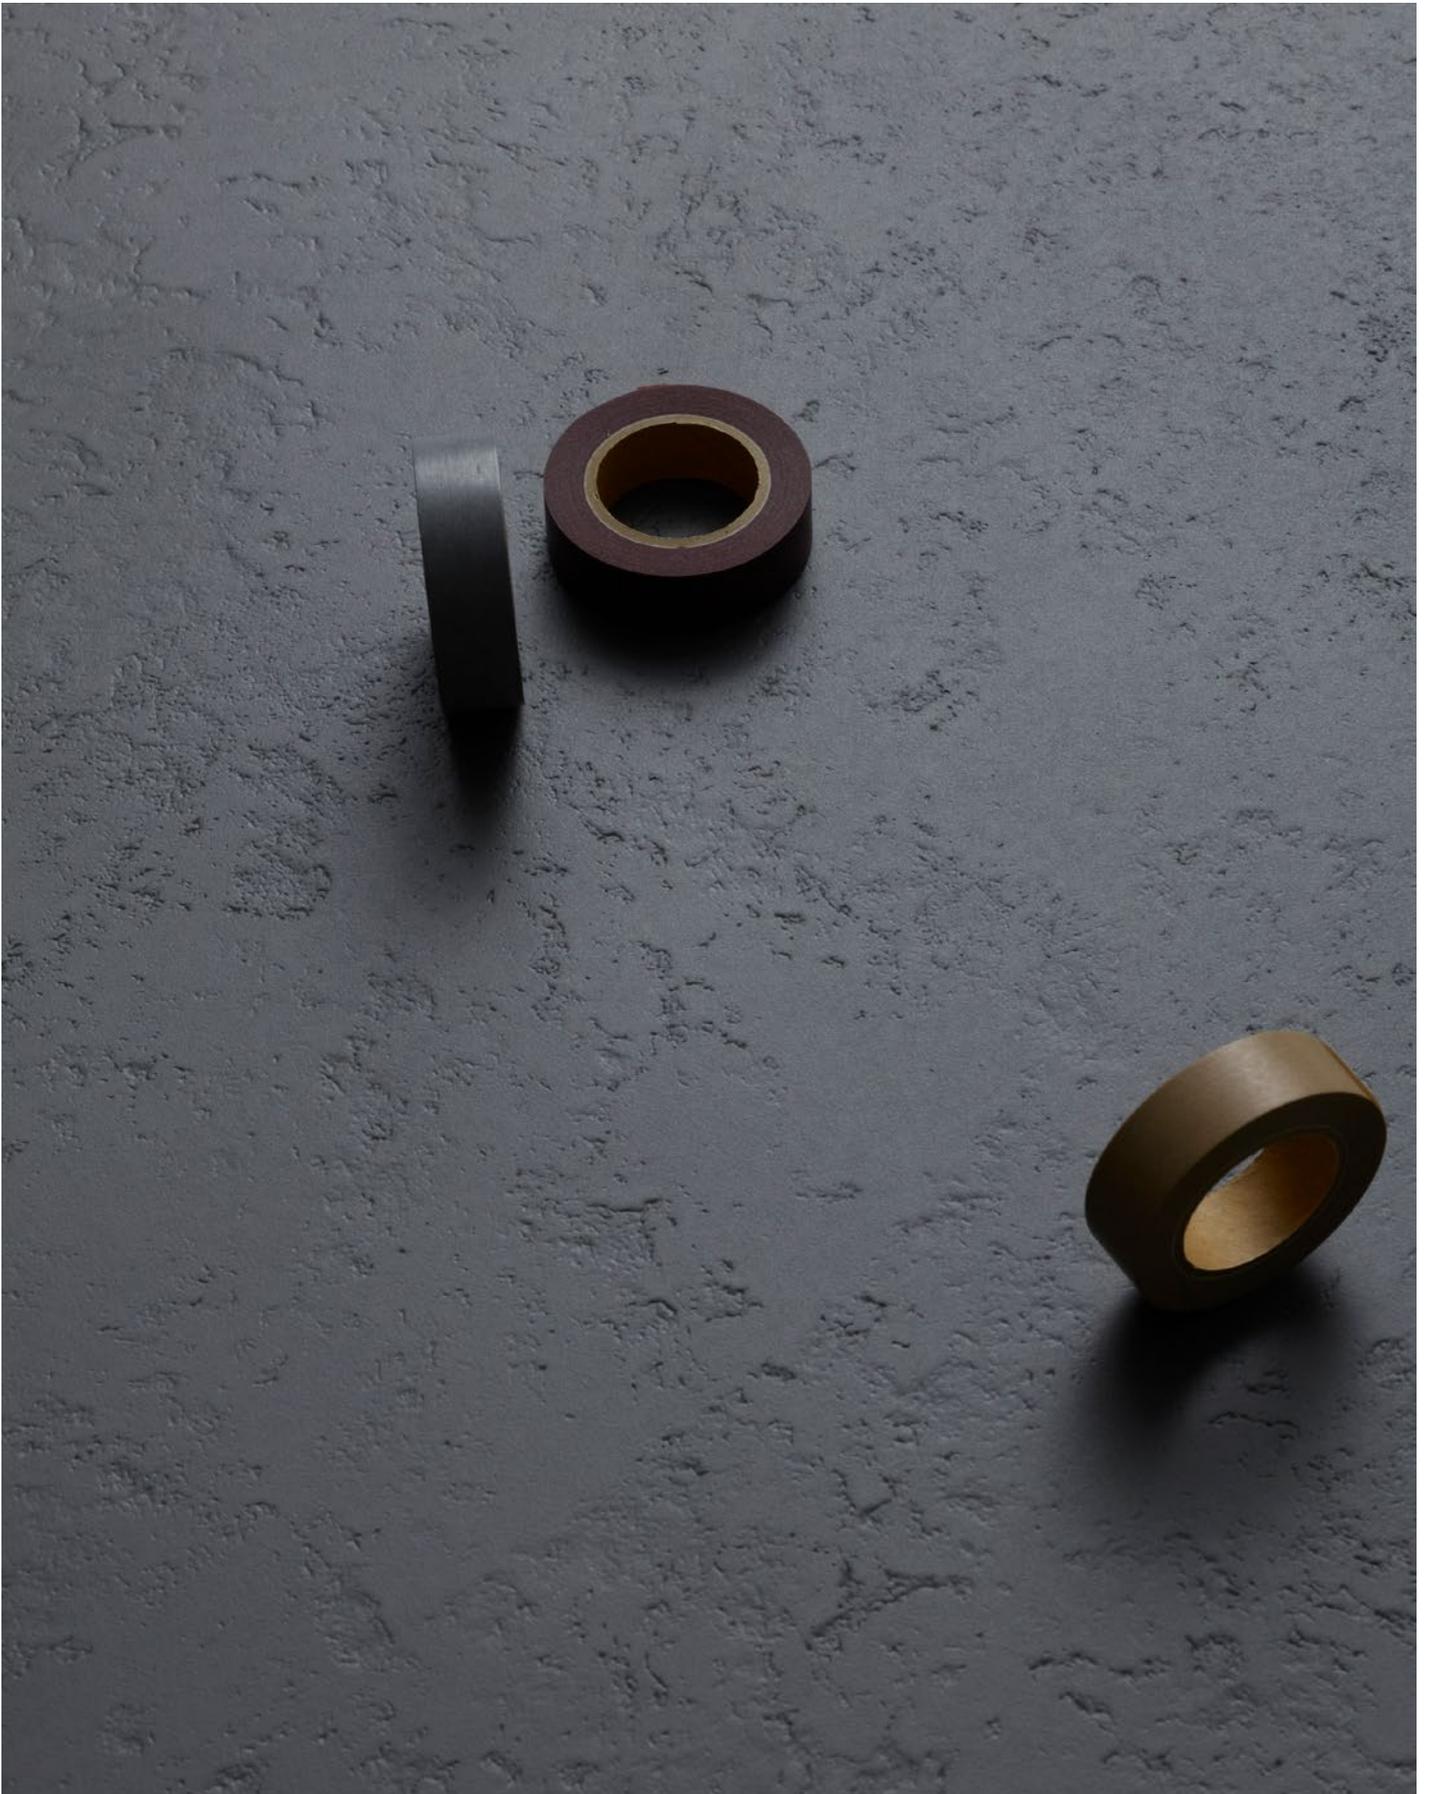

Kosei Dark Grey

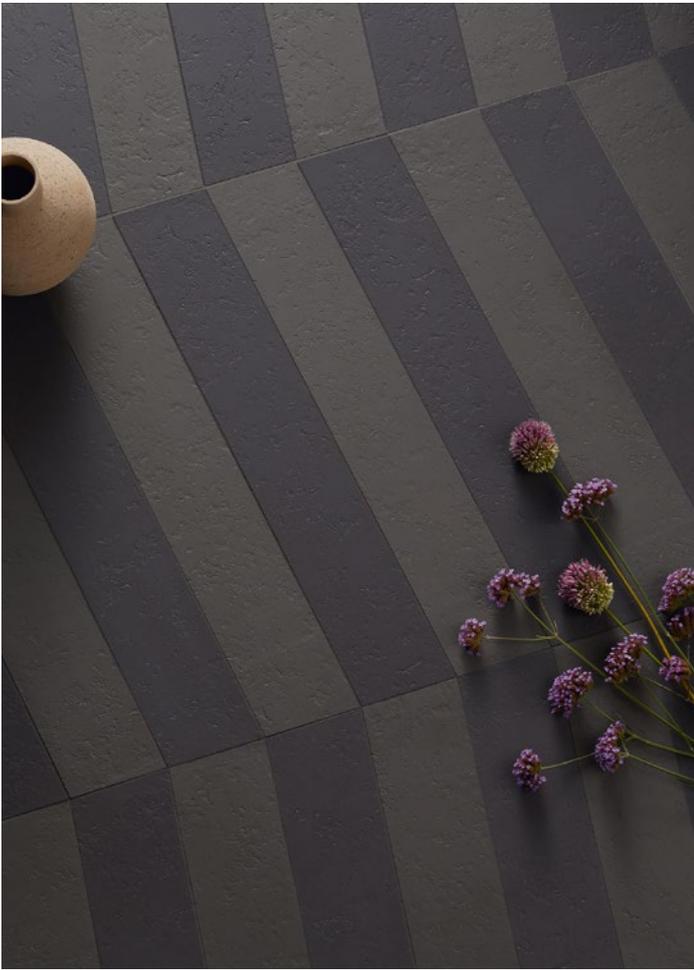


Kosei Chevron Grey Green, Dark Grey

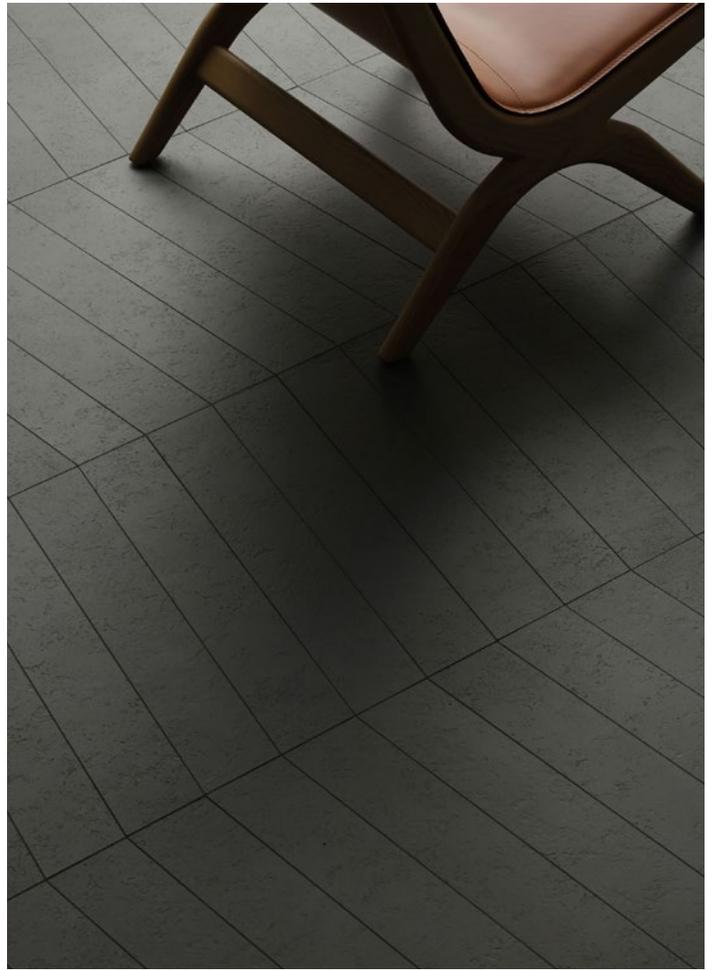

Kosei Chevron Grey Green


## Technical Features

|               |  |
|---------------|--|
| collection    | Kosei  |
| design        | Vincent Van Duysen, 2022                             |
| production    | Industrial   |
| material      | Extruded unglazed porcelain stoneware                |
| thickness     | 0.39"  |
| nominal sizes | 24" · 24", chevron: 4" · 22"                         |
| specification | 5 colours: Bone, Storm, Terra, Grey Green, Dark Grey |
| category      | UNI EN 14411 App A (AI group) UGL                    |



24" · 24"

SX DX



Chevron  
4" · 22"


## Colors




Bone



Storm



Terra




Grey Green



Dark Grey

# Phenomenon

## Tokujin Yoshioka

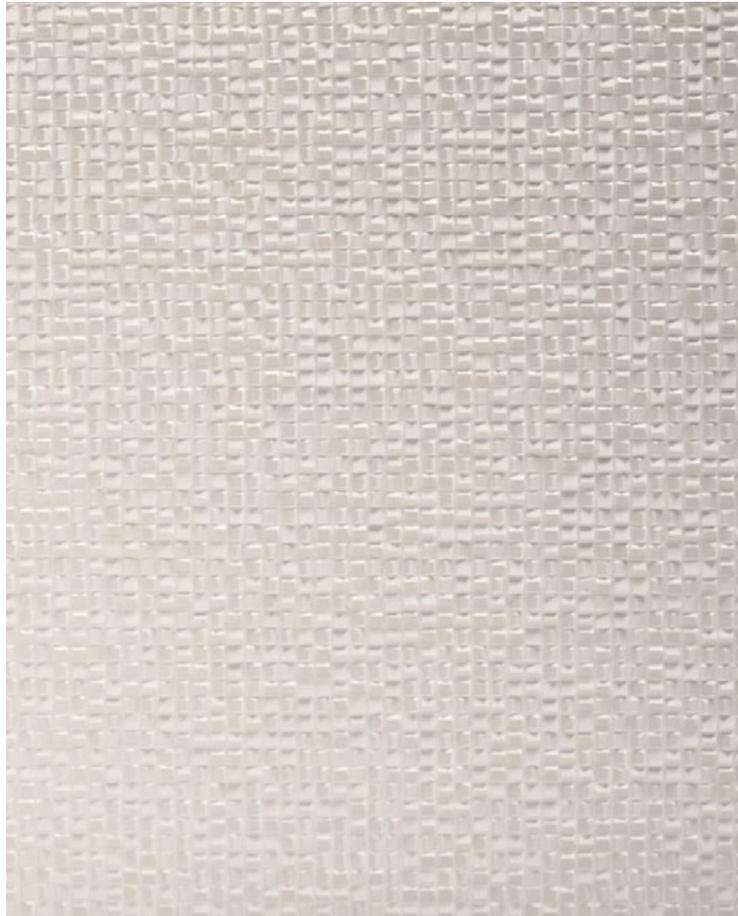

Phenomenon stems from the desire to incorporate natural phenomena and the laws of nature into a contemporary design project, not simply for reproducing their aspect but to evoke an emotion. The collection evokes memories of natural sceneries and individual experiences of the natural world, through patterns such as honeycombs, snowflakes, sticks of ice and

plant cells. The Rain B and Air modules are available in 2 matt colours – Bianco and Nero. Thanks to the combination of small materials and neutral shades, which create poetic and evocative compositions, Phenomenon gives the interiors an effect of vastness and depth.



Phenomenon Rain B Nero



Phenomenon Air Bianco

## Technical Features

### Phenomenon Rain B, Phenomenon Air

|               |  |
|---------------|--|
| collection    | Phenomenon   |
| design        | Tokujiin Yoshioka, 2010 – 2013 – 2022  |
| production    | Artisanal  |
| material      | Homogeneous unglazed porcelain stoneware straws, obtained by pressing and fixed on net   |
| thickness     | RAIN B: min 0.20" – max 0.27"<br>AIR: 0.31"  |
| nominal sizes | RAIN B: net 9 7/8" · 12"<br>AIR: net 12" · 12"   |
| specification | <ul style="list-style-type: none"><li>– 2 colours: Bianco, Nero</li><li>– The mosaic is assembled in sheets to give a "handmade look" to the surface and it represents the finest of modern-day Italian craftsmanship.</li><li>– Each mosaic card is individually pressed with a bespoke 100-holes mould, expressly created to achieve a materic and artisanal feeling, then fired through a bespoke, patented, process.</li><li>– Mutina patented production process and machines (Industrial Patent filed on 02/09/2010 under number MO2010A000247)</li><li>– The cards are manually assembled accurately by expert hands to build a unique, innovative pattern.</li></ul> |
| awards        | ICFF Editors Award Material 2011, Wallpaper Design Award 2011, Edida 2011, Selected for Adi Design Index 2011, Love Tag Azure Magazine 2012, Red Dot Design Award 2012, Interior Innovation Award 2014, Best of Best 2014  |
| patents       | Registered design n° 001912999-0011 – date of registration: 06/09/2011   |
| category      | UNI EN 14411 App G (BIA group) UGL   |

## Colors

### RAIN B



Rain B Bianco



Rain B Nero

### AIR




Air Bianco



Air Nero

# Punto

## Ronan & Erwan Bouroullec

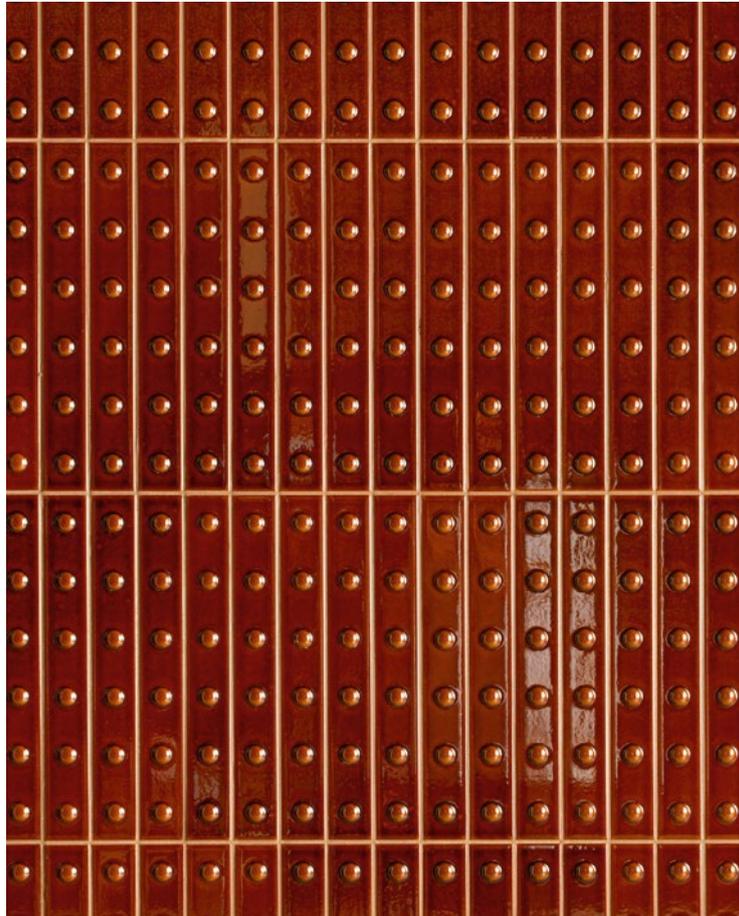

Developed from the concept that inspired Pico collection, Punto is a three-dimensional decorative element that can be used only on walls. The pattern is characterised by big sunken dots (Down) or elevated dots (Up) and finds its highest expression when used on large surfaces. Depending on how light hits the elements, they create unexpected chiaroscuro effects that enliven interiors. Both the Up and Down options are available in a single size of 12''x1,6'', provided on

meshes of five pieces each. The palette presents 3 colours in Glossy finish (Blanc, Vert and Brun), which is obtained by applying a transparent, polished and bright glaze. The traditional double-firing production technique enhanced the preciousness of surfaces, especially in the shades Vert and Brun where a reacting enamel typical of handcrafted pieces guaranteed an exceptional colour rendering.



Punto Down Glossy Vert



Punto Down Glossy Blanc



Punto Up Glossy Brun

## Technical Features

|               |   |
|---------------|---|
| collection    | Punto   |
| design        | Ronan & Erwan Bouroullec, 2021  |
| production    | Industrial  |
| material      | Glazed pressed body   |
| thickness     | Punto Down: 0,5"<br>Punto Up: 0,5"  |
| sizes         | Punto Down: 5 pcs 12" · 1,6" · 0,5" on net: 8" · 12"<br>Punto Up: 5 pcs 12" · 1,6" · 0,5" on net: 8" · 12"  |
| specification | - 2 shapes: up and down<br>- 1 glossy colors: blanc<br>- 2 glossy colors with craquelé glaze: vert and brun |
| use           | Wall – indoor   |
| awards        | Best of Year 2022   |
| category      | Bill UNI EN 14411 GL  |
| patents       | Registered design n° 009069826 – 001/0008 – date of registration: 27/06/2022                                |

## Colors

### GLOSSY



Up Blanc



Down Blanc




Up Brun



Down Brun




Up Vert



Down Vert

# Rombini

## Ronan & Erwan Bouroullec

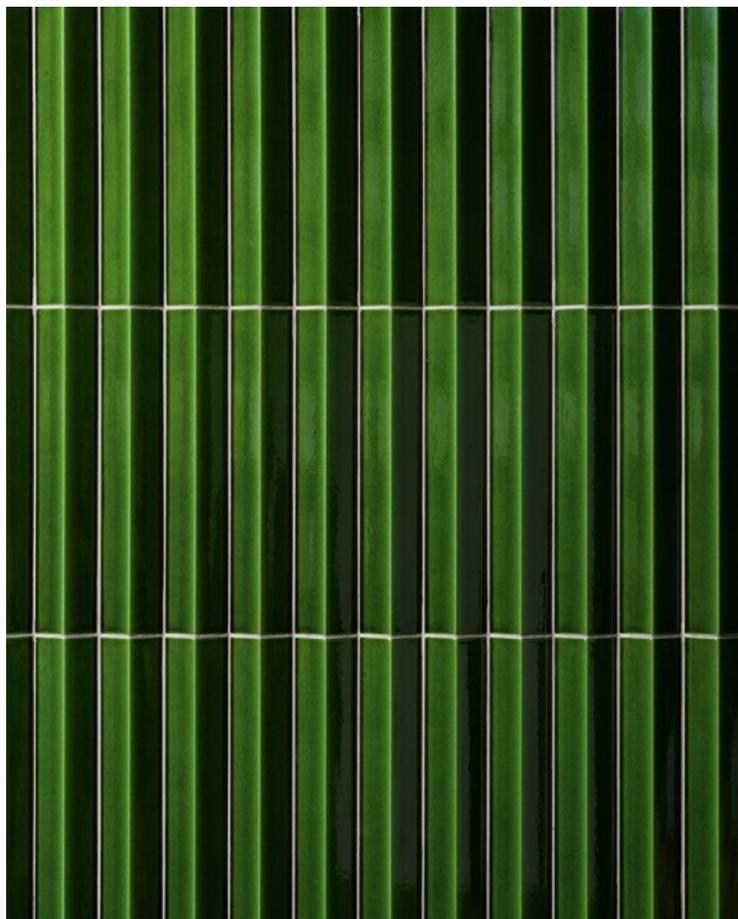


Rombini is a journey made of ceramic vibration, developed through a specific research of more than two years, which allowed to explore the world of colour and surfaces in an unprecedented way. The collection presents a great chromatic strength and has been conceived to provide the interiors an architectural aesthetic. The Triangle module in Extra Small format is available in 3 matt colours – White, Green and Red

– and 3 glossy ones – Blanc, Vert and Brun. Using the traditional double-firing production technique allowed to enhance the preciousness of surfaces, coated with a transparent, polished and bright glaze. Especially, the Vert and Brun shades are obtained by applying a reacting enamel typical of handcrafted pieces, that guaranteed an exceptional colour rendering.



Rombini Triangle Small Matt White

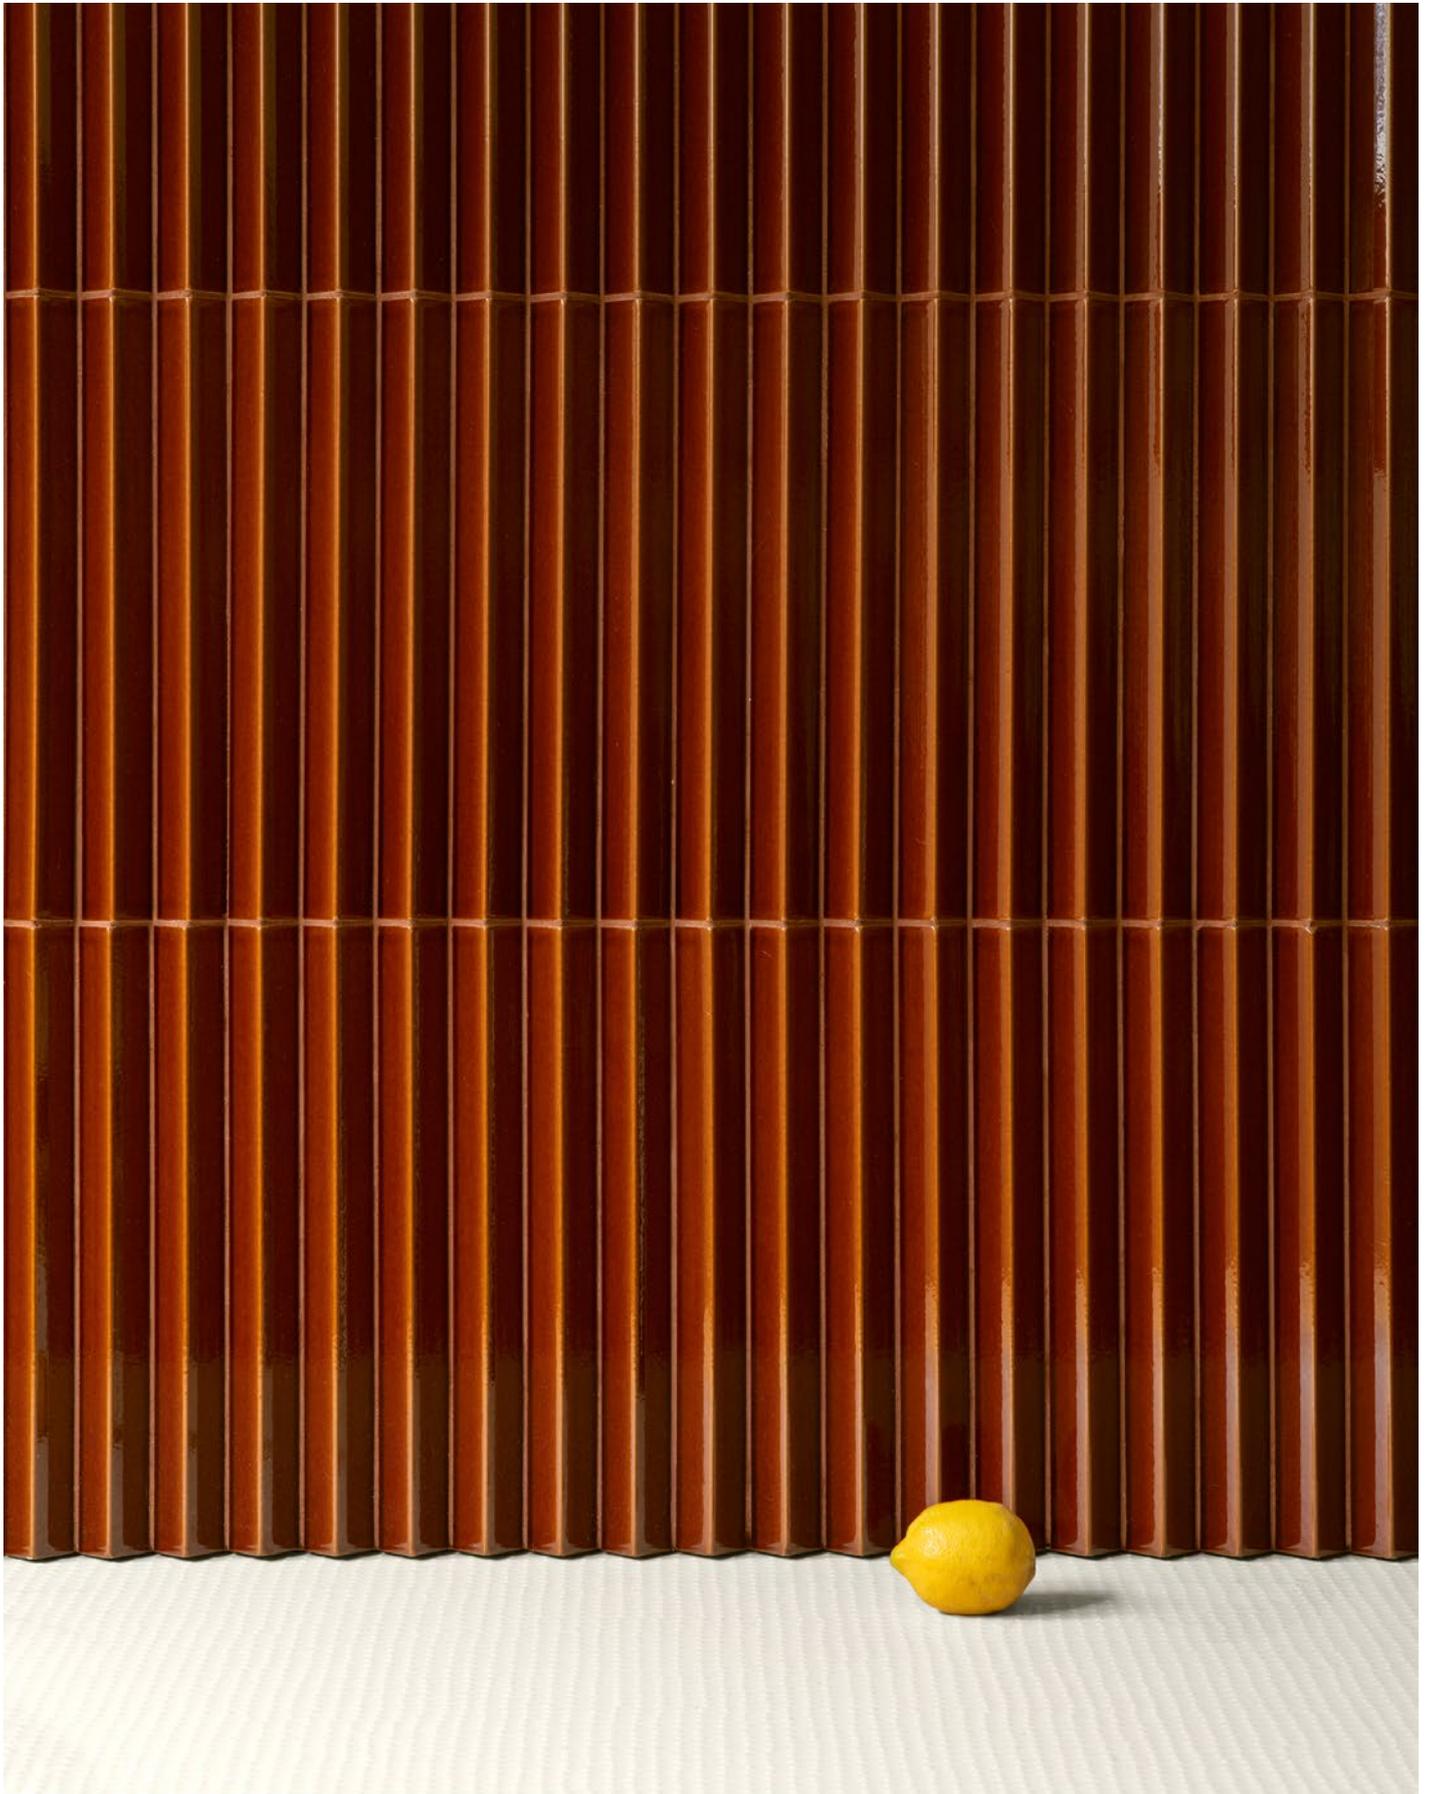

Rombini Triangle Small Glossy Brun

## Technical Features


|                      |  |
|----------------------|--|
| collection           | Rombini  |
| design               | Ronan & Erwan Bouroullec, 2015, 2021   |
| production           | Industrial   |
| material             | Glazed pressed body  |
| thickness            | 1"   |
| nominal sizes        | 5 pcs 12".1".1", on net 7".12"   |
| specification        | With Triangle, the shape of the rhombus is interpreted in its three-dimensional shape, in order to create games of lights and shadow on the surface: the elements seem to arise from the floor and to carry on the wall covering.<br>Triangle is obtain by press in special 3D mold, then glazed and assembled on net. This allow to use Triangle also on concave or convex curved surfaces. |
| use                  | Wall – indoor  |
| complementary pieces | Terminal Extra Small, Small and Large in all colors and finishing.<br>Listello in all colors and finishing.  |
| awards               | Archiproducts Design Award 2016  |
| patents              | Registered design n° 002889055-0019/0024 – date of registration: 03/12/2015  |
| category             | Triangle BIII UNI EN 14411 GL  |

## Colors

### TRIANGLE SMALL – GLOSSY



Blanc



Brun



Vert


### TRIANGLE SMALL – MATT



White



Red



Green

# Combinations

With the elements of the Mutina America Program we propose some floor and wall combinations that can be designed as a single item design or a combination of various items.



1 Kosei Bone, Phenomenon Air Bianco, Rombini Triangle Small Matt White




2 Kosei Chevron Grey Green, Phenomenon Rain B Bianco, Punto Down Glossy Blanc



3

Kosei Storm, Phenomenon Rain B Nero, Rombini Triangle Small Glossy White

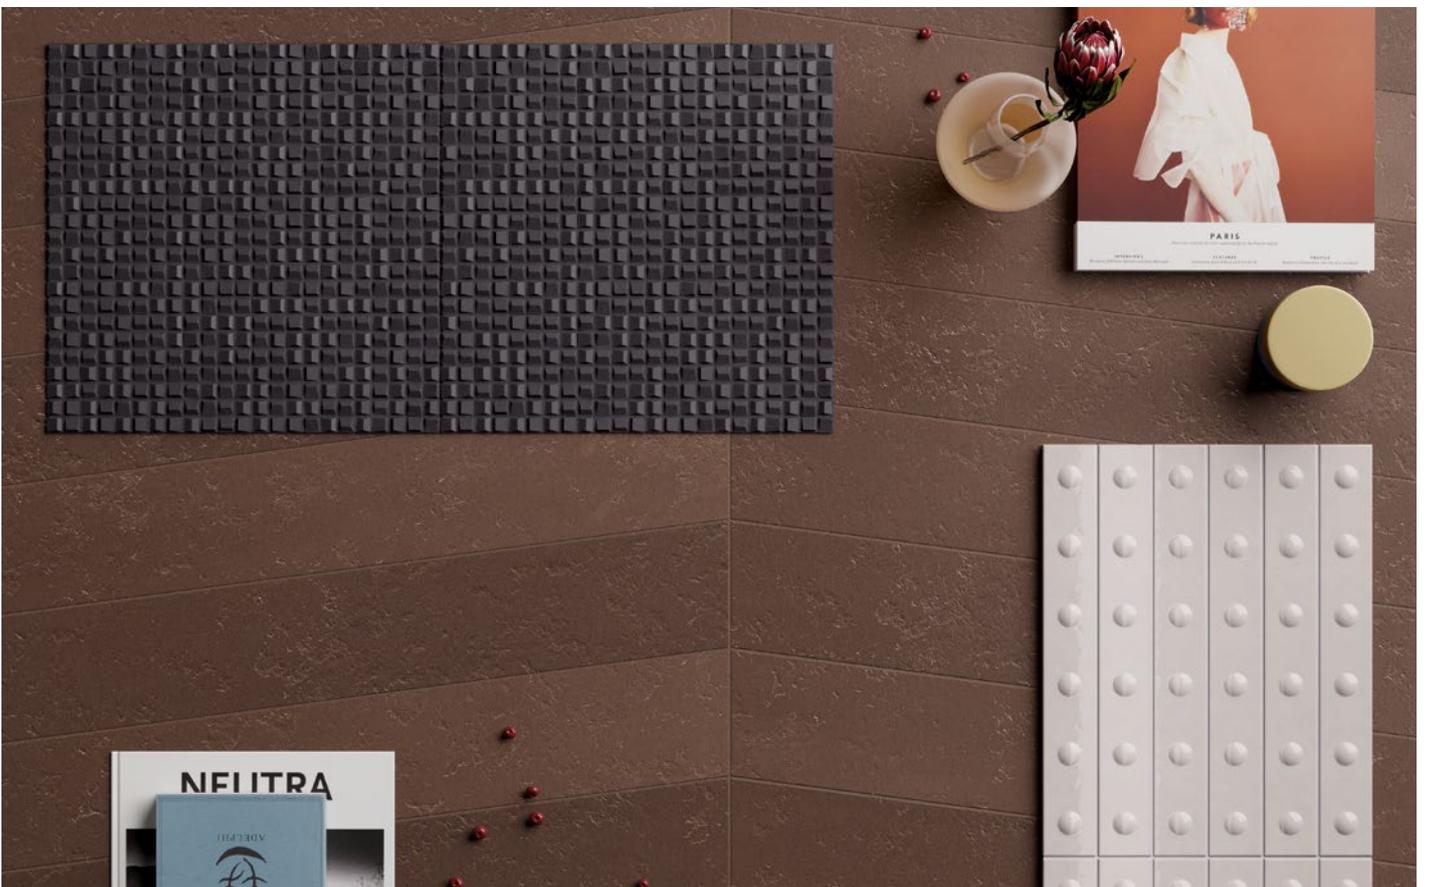


4

Kosei Chevron Terra, Phenomenon Air Nero, Punto Up Glossy Blanc




5

Kosei Terra, Phenomenon Air Nero, Rombini Triangle Small Matt Red

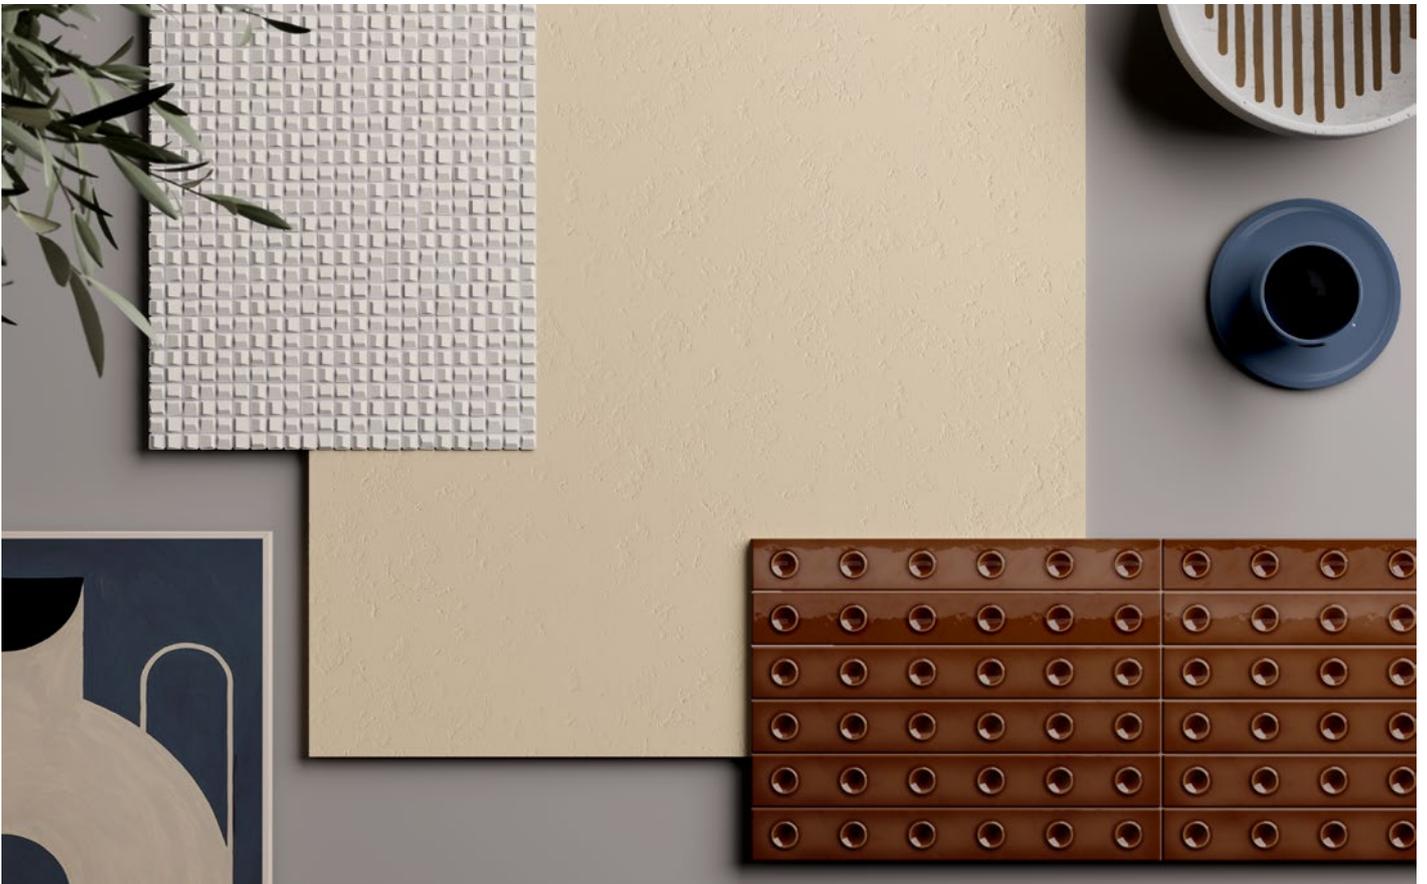


6

Kosei Bone, Phenomenon Air Bianco, Punto Down Glossy Red

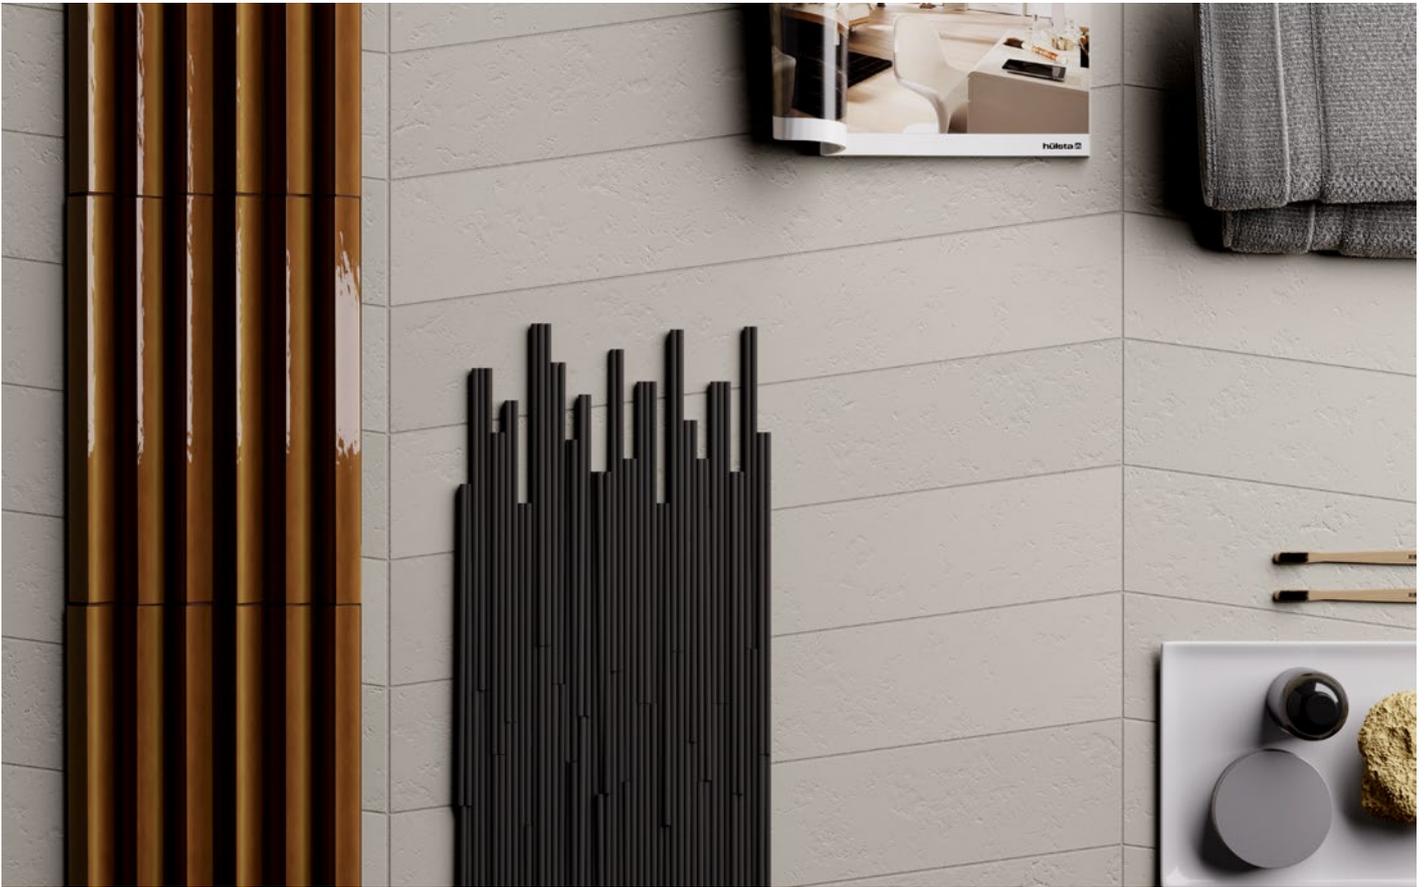

7

Kosei Chevron Storm, Phenomenon Rain B Nero, Rombini Triangle Small Glossy Red

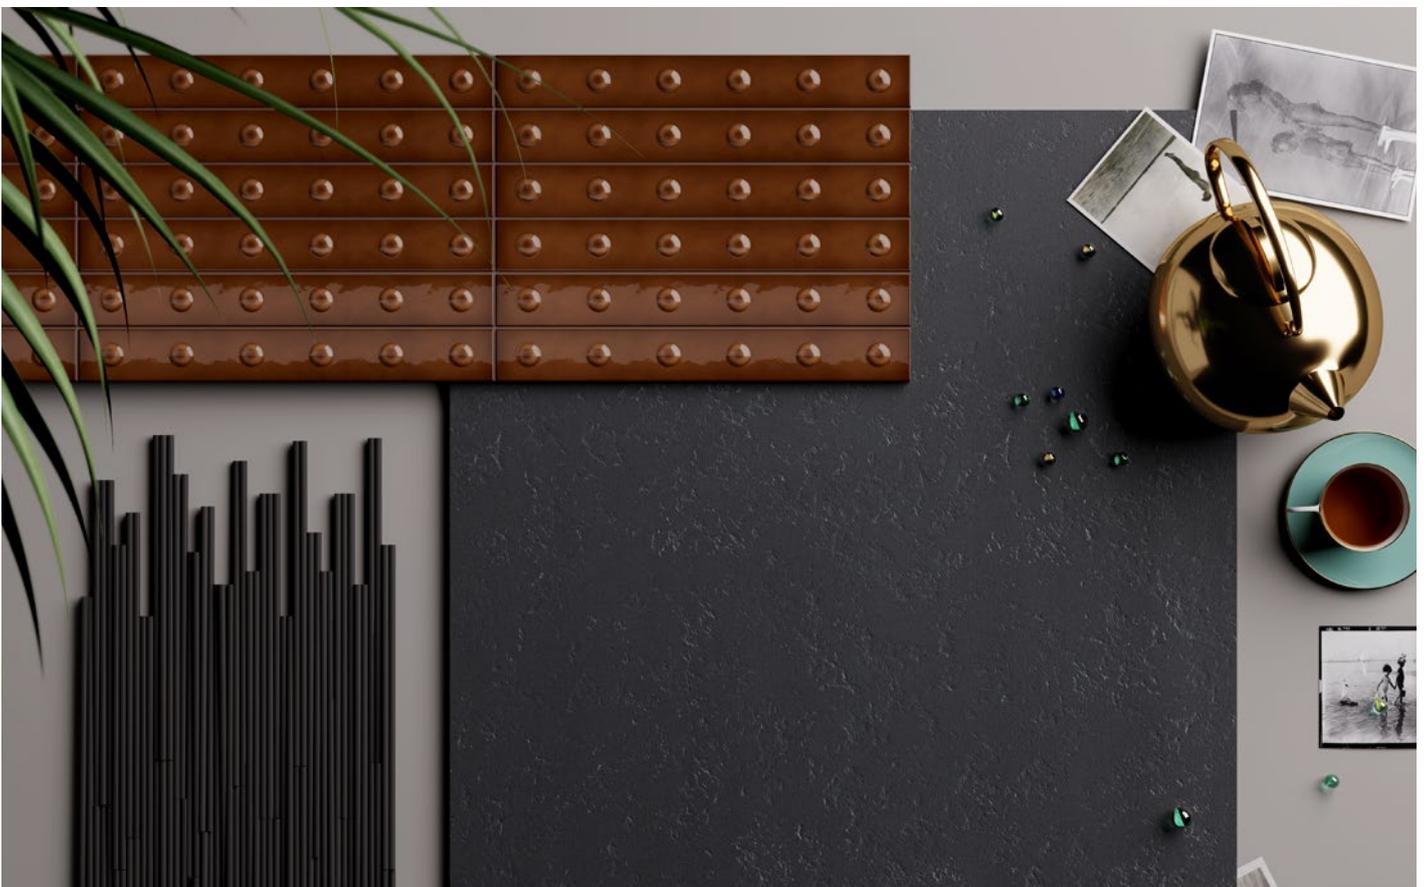


8

Kosei Dark Grey, Phenomenon Rain B Nero, Punto Up Glossy Red



9

Kosei Chevron Dark Grey, Phenomenon Air Nero, Rombini Triangle Small Glossy Vert

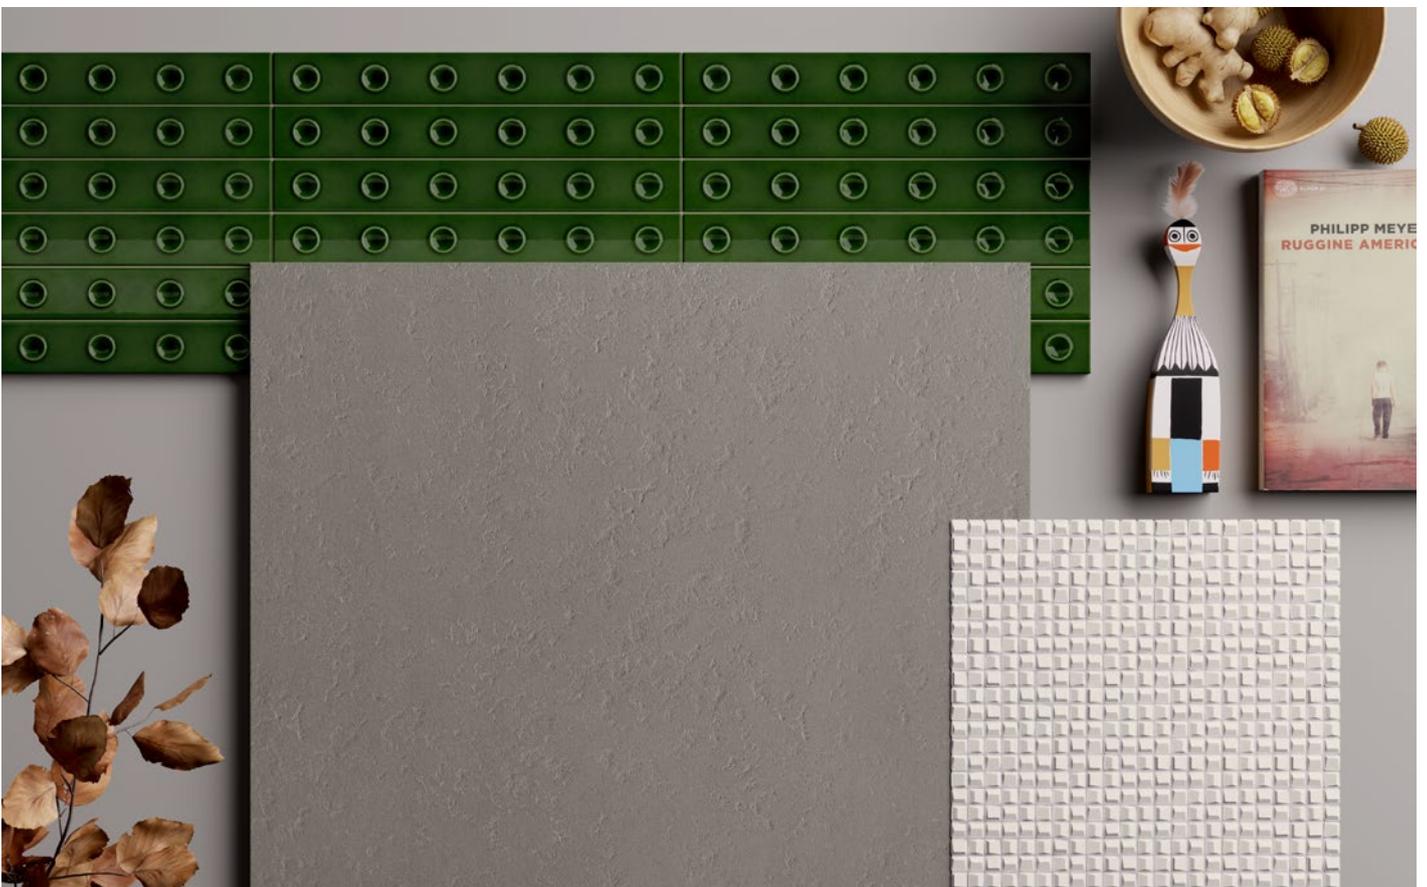


10

Kosei Storm, Phenomenon Air Bianco, Punto Down Glossy Vert



11 Kosei Grey Green, Phenomenon Rain B Bianco, Rombini Triangle Small Matt Green

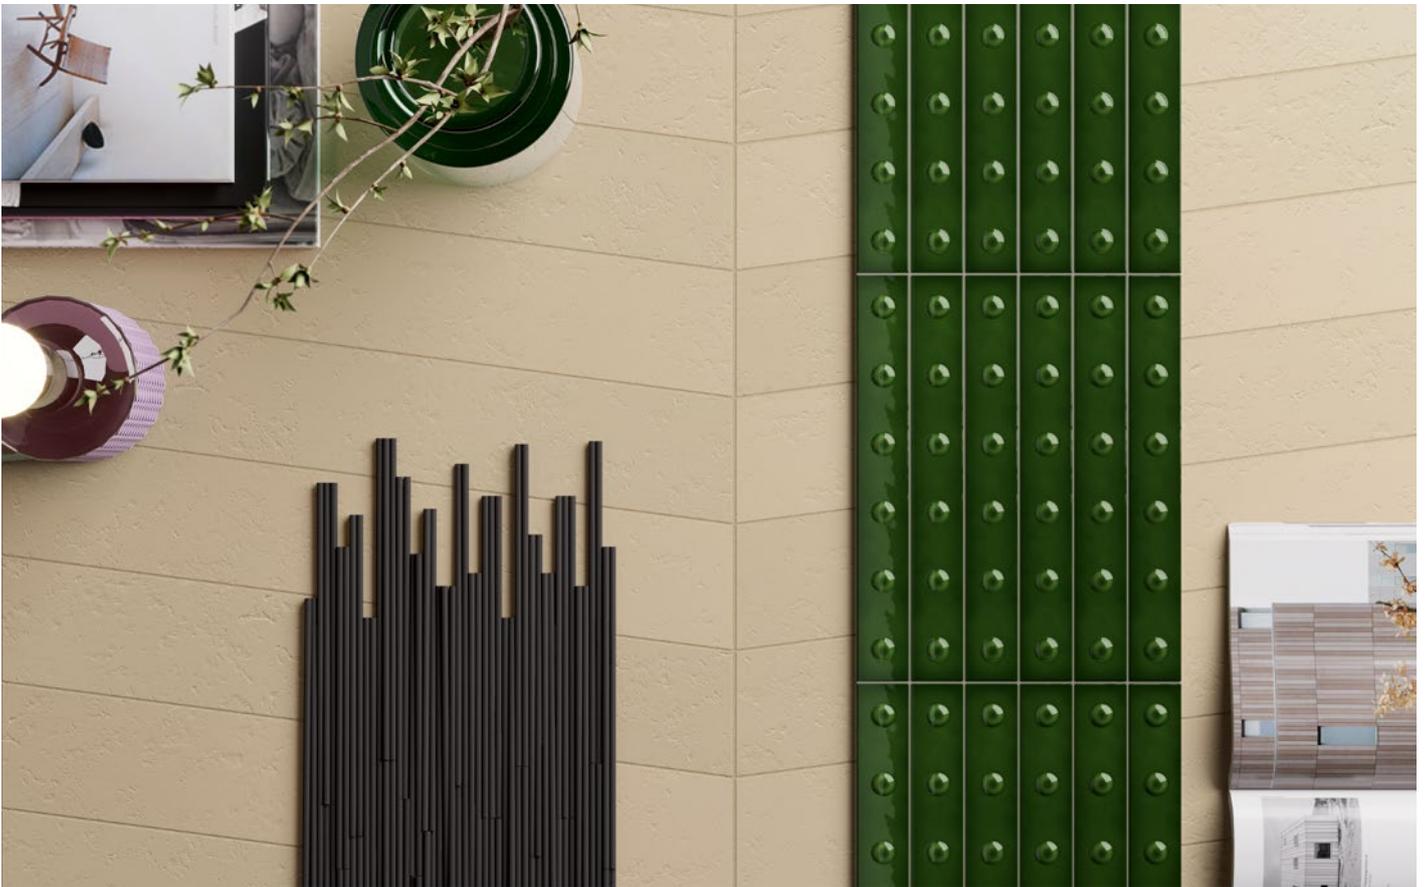

12 Kosei Bone, Phenomenon Rain B Nero, Punto Up Glossy Vert


# Suggestions

With the previous floor and wall combinations, we created some interior suggestions to show how the elements can be used to decorate environments.



**Interior made with  
Combination 2**

Kosei Chevron Grey Green + Dark Grey,  
Phenomenon Rain B Bianco, Punto Down Glossy Blanc

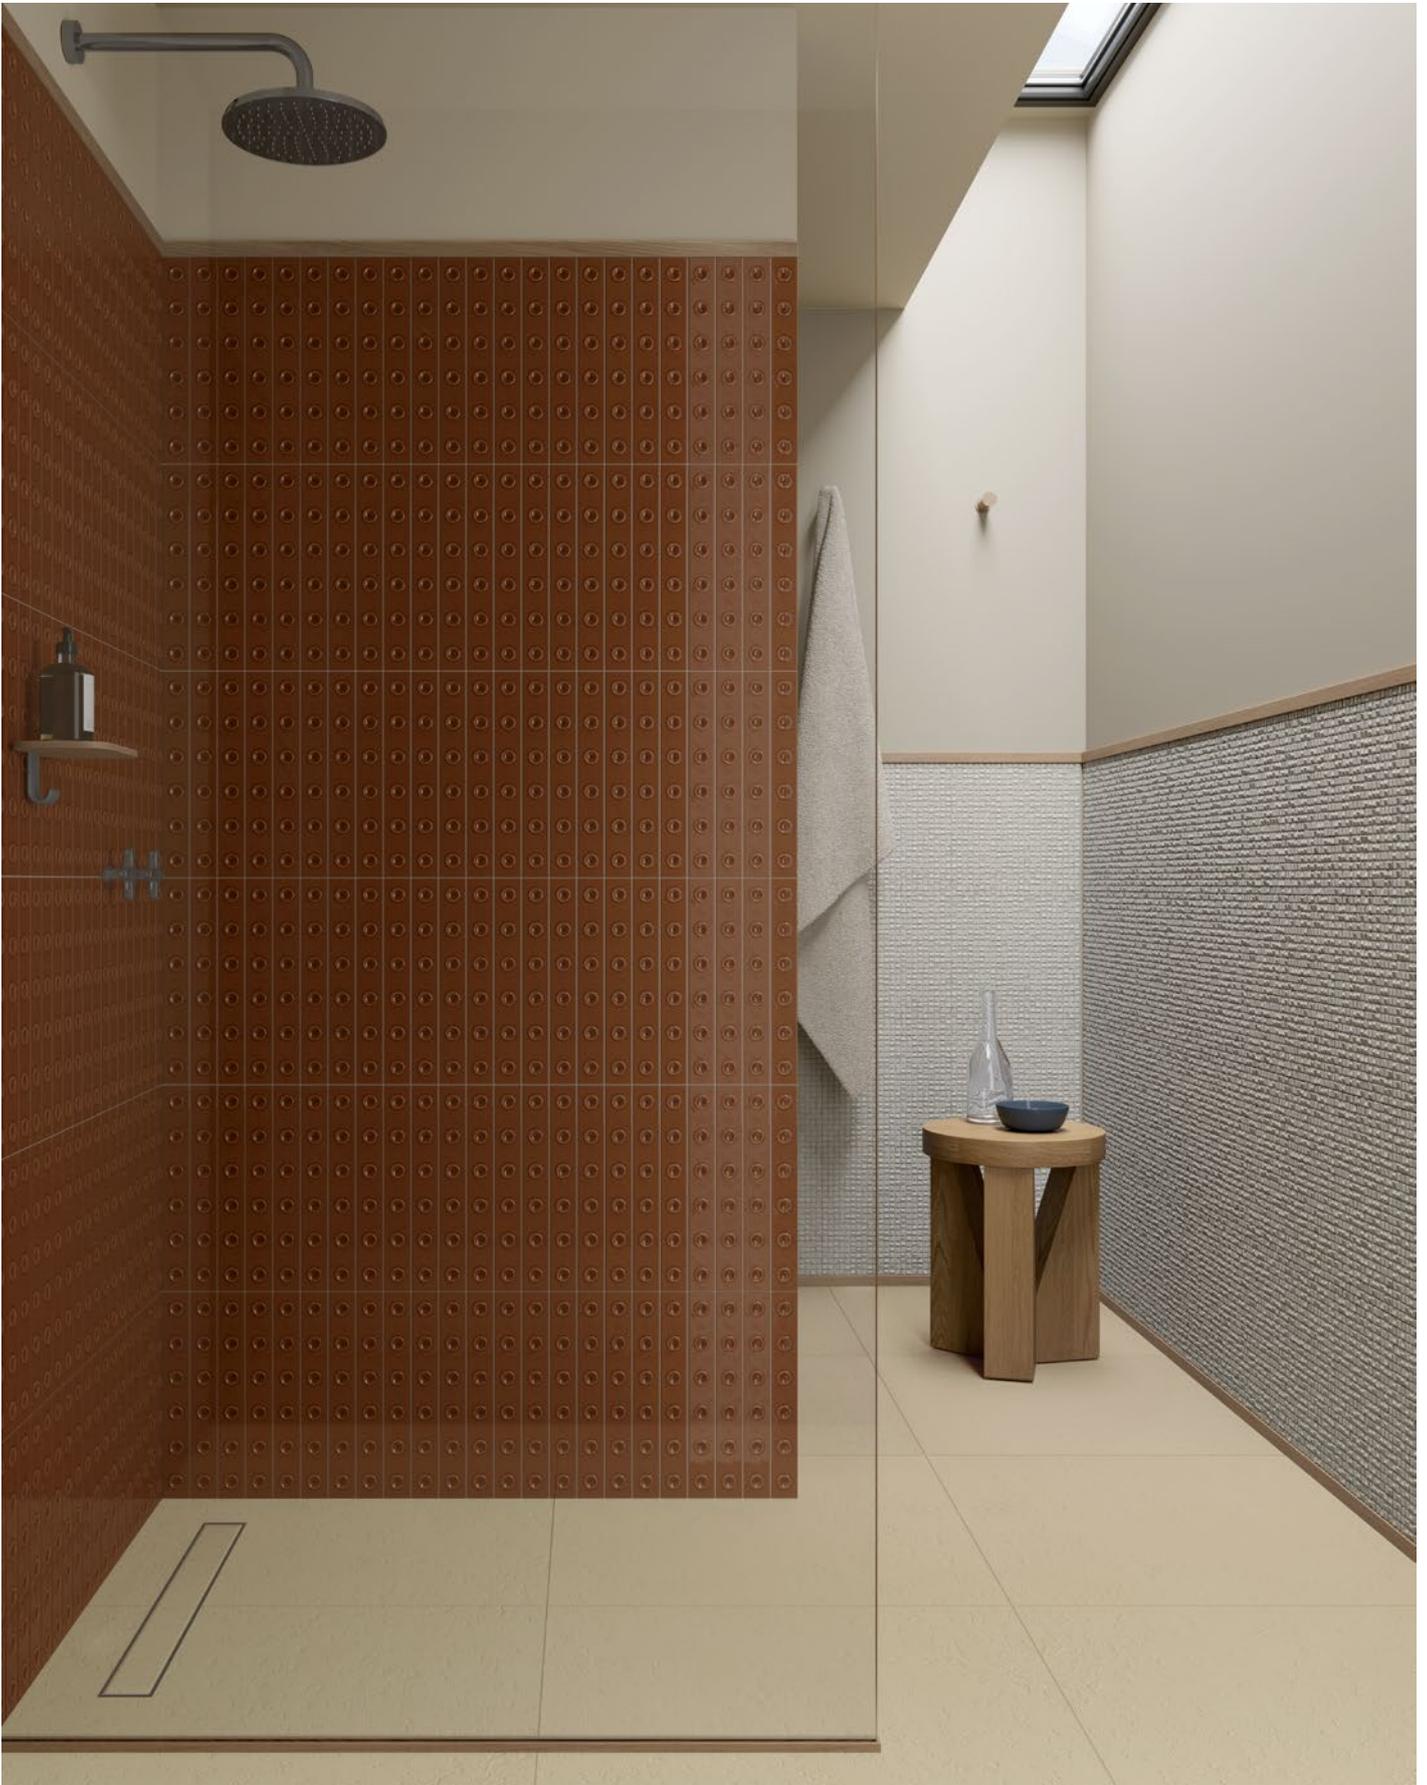

**Interior made with  
Combination 6**

Kosei Bone, Phenomenon Air Bianco, Punto Down Glossy Red



**Interior made with  
Combination 9**


Kosei Chevron Dark Grey, Phenomenon Air Nero,  
Rombini Triangle Small Glossy Vert

**Mutina**

# Technical Features

# Kosei

|               |  |
|---------------|--|
| collection    | Kosei  |
| design        | Vincent Van Duysen, 2022                             |
| production    | Industrial   |
| material      | Extruded unglazed porcelain stoneware                |
| thickness     | 0.39"  |
| nominal sizes | 24"·24", chevron: 4"·22"                             |
| specification | 5 colours: Bone, Storm, Terra, Grey Green, Dark Grey |
| category      | UNI EN 14411 App A (AI group) UGL                    |



24"·24"

SX DX



Chevron  
4"·22"

## Laying and maintenance tips

|                                     |   |
|-------------------------------------|---|
| use                                 | Floors, walls – indoor, outdoor.  |
| recommended adhesive                | Adhesive for porcelain stoneware.   |
| recommended joints                  | 0.08" / 2mm joints  |
| recommended fillers                 | CEMENT-BASED GROUT / EPOXY GROUT.<br>Remove all traces of grout carefully before it dries completely.   |
| cleaning at the end of installation | CEMENT-BASED GROUT: Buffered acid (e.g. DETERDEK PRO by FILA or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 2-3 minutes then use a white scotch brite pad and rinse well with clean water.<br>EPOXY GROUT: Alkaline detergent (e.g. FILA CR10 by FILA). FILA CR10: apply pure, wait for 30 minutes then use a green scotch brite pad.<br>SILICONE: Solvent for silicone e.g. FILA ZERO SIL. Put it straight onto the stain, wait for 20 minutes and remove the mark using scotch brite.<br>PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable.<br>RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly.   |
| general cleaning (installed tiles)  | You are recommended to use ordinary neutral detergent diluted in water. Avoid using acid or alkaline products, waxes and/or impregnants. During ordinary cleaning it is recommended to use extremely abrasive items (such as scourers and iron or steel sponges) as little as possible. This recommendation must be adhered to rigorously in the case of tiles with a glossy surface finishing as they are more susceptible to the risk of scuffs, scratches and loss of shine, etc. In the event of heavy dirt or particularly textured surfaces, use an alkaline detergent and rinse after washing. For large surfaces, the use of a floor washing machine is recommended. During every-day cleaning procedures, it is necessary to remember that certain types of dirt (dust, sand) increase the abrasive effect of foot-traffic. Therefore we recommend that you avoid bringing in this type of dirt, which comes in from the outside, by placing a door-mat at the entrance. |

## Colors




Bone



Storm



Terra



Grey Green



Dark Grey

## Technical features

| STANDARD   | FEATURES  | VALUE REQUIRED   | KOSEI                       |
|--|---|--|-----------------------------|
| ISO 10545/2  | SIZES<br>length and width<br>thickness<br>straightness of edges<br>wedging<br>flatness  | $\pm 1\%$<br>$\pm 10\%$<br>$\pm 0,5\%$<br>$\pm 1\%$<br>$\pm 0,5\%/0,8\%$ | in conformity with standard |
| ISO 10545/3  | water absorption  | < 0,5%   | 0,06%                       |
| ISO 10545/4  | breaking strength<br>modulus of rupture   | $\geq 1300$ N<br>$\geq 32$ N/mm <sup>2</sup>                             | in conformity with standard |
| ISO 10545/9  | resistance to thermal shock   | comply requirements  | resistant                   |
| ISO 10545/12   | frost resistance  | comply requirements  | resistant                   |
| ISO 10545/13   | Resistance to acids and alkalis<br>(low and high concentration)<br>Resistance to household cleaning agents<br>and swimming pool chemicals | declared value<br>minimum class B  | A<br>A                      |
| ISO 10545/14   | stains resistance   | minimum 3  | 5                           |
| DIN 51130  |   |  | R10                         |
| DIN 51097  |   |  | B                           |
| DCOF   |   | > 0.42   | 0.84                        |
| Pendulum BS<br>(EN 16165-c)  |   |  | 55 dry<br>45 wet            |
| Pendulum AS/NZS<br>(4586313 app A)                                 |   |  | 44<br>P3                    |
| Pendulum ES<br>(UNE 41901)   |   |  | 45<br>C2                    |
| ISO 14001  |   |  |                             |
| VOC Emission<br>Declaration of Contents<br>EPD<br>SVHC declaration |   |  | available upon request      |




# Phenomenon


## Phenomenon Rain B, Phenomenon Air

|               |   |
|---------------|---|
| collection    | Phenomenon  |
| design        | Tokuji Yoshioka, 2010 – 2013 – 2022   |
| production    | Artisanal   |
| material      | Homogeneous unglazed porcelain stoneware straws, obtained by pressing and fixed on net  |
| thickness     | RAIN B: min 0.20" – max 0.27"<br>AIR: 0.31"   |
| nominal sizes | RAIN B: net 9 7/8" · 12"<br>AIR: net 12" · 12"  |
| specification | <ul style="list-style-type: none"> <li>– 2 colours: Bianco, Nero,</li> <li>– The mosaic is assembled in sheets to give a "handmade look" to the surface and it represents the finest of modern-day Italian craftsmanship.</li> <li>– Each mosaic card is individually pressed with a bespoke 100-holes mould, expressly created to achieve a materic and artisanal feeling, then fired through a bespoke, patented, process.</li> <li>– Mutina patented production process and machines (Industrial Patent filed on 02/09/2010 under number MO2010A000247)</li> <li>– The cards are manually assembled accurately by expert hands to build a unique, innovative pattern.</li> </ul> |
| awards        | ICFF Editors Award Material 2011, Wallpaper Design Award 2011, Edida 2011, Selected for Adi Design Index 2011, Love Tag Azure Magazine 2012, Red Dot Design Award 2012, Interior Innovation Award 2014, Best of Best 2014   |
| patents       | Registered design n° 001912999-0011 – date of registration: 06/09/2011  |
| category      | UNI EN 14411 App G (BIA group) UGL  |

RAIN B


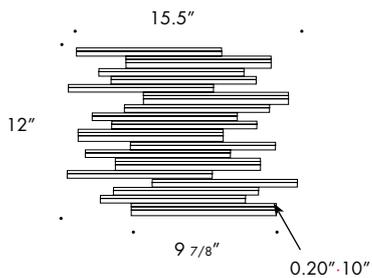


section



net 9 7/8" · 12"

AIR

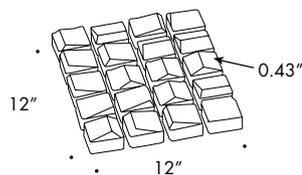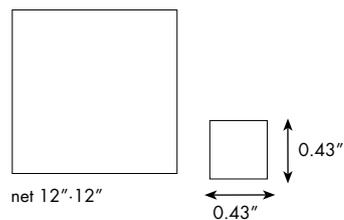

## Laying and maintenance tips

|                                     |   |
|-------------------------------------|---|
| use                                 | (RAIN B, AIR) Wall – indoor, outdoor.   |
| installation                        | Lay on perfectly flat, dry walls.   |
| recommended adhesive                | NON-RAPID-DRYING adhesive for porcelain stoneware to make it easier to fix the sheets.  |
| recommended joints                  | 0.08" / 2mm joints.   |
| recommended fillers                 | CEMENT-BASED GROUT: (all mosaics). Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely.<br>EPOXY GROUT: (rock, honey A only). Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely.  |
| cleaning at the end of installation | CEMENT-BASED GROUT: Buffered acid (e.g. DETERDEK PRO by FILA, or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 2 or 3 minutes then use a white scotch brite pad and rinse well with clean water.<br>EPOXY GROUT: Alkaline detergent (e.g. FILA CR10 by FILA). FILA CR10: apply pure, wait for 30 minutes then use a green scotch brite pad.<br>SILICONE: Solvent for silicone (e.g. FILA ZERO SIL.). Pour it straight onto the stain, wait for 20 minutes and remove the mark using scotch brite.<br>PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable.<br>RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly. |
| general cleaning (installed tiles)  | You are recommended to use ordinary neutral detergent diluted in water. Avoid using acid or alkaline products, waxes and/or impregnants. During ordinary cleaning it is recommended to use extremely abrasive items (such as scourers and iron or steel sponges) as little as possible. This recommendation must be adhered to rigorously in the case of tiles with a glossy surface finishing as they are more susceptible to the risk of scuffs, scratches and loss of shine, etc. In the event of heavy dirt or particularly textured surfaces, use an alkaline detergent and rinse after washing.   |
| calibers (real size)                | –   |

## Colors

### RAIN B



Rain B Bianco



Rain B Nero

### AIR



Air Bianco



Air Nero


## Technical features

| STANDARD                       | FEATURES                       | VALUE REQUIRED        | PHENOMENON              |
|--------------------------------|--------------------------------|-----------------------|-------------------------|
| ISO 10545/3                    | water absorption               | < 0,5%                | 0,1%                    |
| ISO 10545/9                    | resistance to thermal shock    | no visible alteration | resistant               |
| ISO 10545/12                   | frost resistance               | no visible alteration | resistant               |
| ISO 10545/13                   | resistance to chemical attacks | minimum B             | A<br>B glossy finishing |
| ISO 10545/14                   | stains resistance              | minimum 3             | 5                       |
| <b>VOC Emission</b>            |                                |                       | available upon request  |
| <b>Declaration of Contents</b> |                                |                       | available upon request  |
| <b>EPD</b>                     |                                |                       | available upon request  |
| <b>SDS</b>                     |                                |                       | available upon request  |
| <b>BPD3</b>                    |                                |                       | available upon request  |
| <b>HPD</b>                     |                                |                       | available upon request  |


# Punto

|               |  |
|---------------|--|
| collection    | Punto  |
| design        | Ronan & Erwan Bouroullec, 2021   |
| production    | Industrial   |
| material      | Glazed pressed body  |
| thickness     | Punto Down: 0,5"<br>Punto Up: 0,5"   |
| sizes         | Punto Down: 5 pcs 12'' · 1,6'' · 0,5'' on net: 8'' · 12''<br>Punto Up: 5 pcs 12'' · 1,6'' · 0,5'' on net: 8'' · 12'' |
| specification | - 2 shapes: up and down<br>- 1 glossy colors: blanc<br>- 2 glossy colors with craquelé glaze: vert and brun          |
| use           | Wall – indoor  |
| awards        | Best of Year 2022  |
| category      | BIII UNI EN 14411 GL   |
| patents       | Registered design n° 009069826 – 001/0008 – date of registration: 27/06/2022   |

PUNTO UP

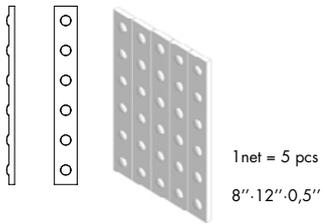

PUNTO DOWN

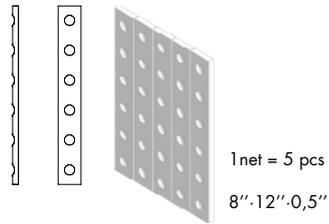

## Laying and maintenance tips

|                                     |   |
|-------------------------------------|---|
| use                                 | Wall – indoor   |
| installation                        | Lay on perfectly flat, dry walls.   |
| recommended adhesive                | NON RAPID DRYING adhesive for porcelain stoneware to make it easier to fix the sheets.  |
| recommended joints                  | Place the sheets with the same joint as within the sheet.   |
| recommended fillers                 | FINE-GRAIN CEMENT BASE GROUT: Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely. EPOXY GROUT: Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely. Do not use for Punto Vert and Punto Brun.  |
| cleaning at the end of installation | <p>– Punto Vert and Punto Brun: do not use abrasive cleaners / do not use acid or alkaline products. / Craquelé is a type of glazed ceramics characterised by micro-cracks on the surface, deliberately created as a distinctive finish. This particular process makes the material sensitive to acids. For ordinary maintenance, anti-limescale products should be avoided, because they can dull the surface.</p> <p>Please proceed as follows:</p> <ol style="list-style-type: none"> <li>1. Treatment pre-grouting with FILA MP90, solvent based stain protector.</li> <li>2. Grouting with cement-based grout, possibly do not grout in contrast</li> <li>3. Cleaning at the end of installation with cleaner FILA CLEANER PRO, neutral detergent, dilute the product in a ratio 1:30</li> <li>4. Final cleaning with FILA MP90</li> </ol> <p>– Punto Matt and Glossy: do not use abrasive cleaners, especially for glossy finishing.</p> <p>FINE-GRAIN CEMENT BASE GROUT: Buffered acid (e.g. Deterdek by FILA, Deltaplus by KERAKOLL, or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 5 minutes then use a white scotch brite pad and rinse well with clean water. EPOXY GROUT: Alkaline detergent (e.g. Fugasap by KERAKOLL, PS/87 by FILA). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 5 minutes then use a white scotch brite pad and rinse well with clean water. SILICONE: Solvent for silicone (e.g. Remosil). Pour it straight onto the stain, wait for 1-2 minutes and remove the mark using scotch brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable.</p> |
| general cleaning (installed tiles)  | Punto Vert and Punto Brun: do not use abrasive cleaners / do not use acid or alkaline products. For ordinary maintenance, anti-limescale products should be avoided, because they can dull the surface. Punto Matt and Glossy do not use abrasive cleaners, especially for glossy finishing.  |
| calibers (real size)                | –   |

## Colors

### GLOSSY



Up Blanc



Down Blanc




Up Brun



Down Brun



Up Vert



Down Vert


## Technical features

| STANDARD                | FEATURES                       | VALUE REQUIRED        | PUNTO                  |
|-------------------------|--------------------------------|-----------------------|------------------------|
| ISO 10545/3             | water absorption               | x >10%                | 17,0%                  |
| ISO 10545/4             | breaking strength              | Sp > 7,5 min 600      | in conformity          |
| ISO 10545/9             | resistance to thermal shock    | no visible alteration | unaffected             |
| ISO 10545/11            | crazing resistance             | no visible alteration | unaffected             |
| ISO 10545/13            | resistance to chemical attacks | min B                 | A – B                  |
| ISO 10545/14            | stains resistance              | class 3               | class 5                |
| LEED CERTIFICATION 4.1  |                                |                       | 64% recycled material  |
| VOC Emission            |                                |                       | available upon request |
| Declaration of Contents |                                |                       | available upon request |
| SDS                     |                                |                       | available upon request |
| BPD3                    |                                |                       | available upon request |
| HPD                     |                                |                       | available upon request |

# Rombini

|                      |  |
|----------------------|--|
| collection           | Rombini  |
| design               | Ronan & Erwan Bouroullec, 2015, 2021   |
| production           | Industrial   |
| material             | Glazed pressed body  |
| thickness            | 1"   |
| nominal sizes        | 5 pcs 12".1".1", on net 7".12"   |
| specification        | With Triangle, the shape of the rhombus is interpreted in its three-dimensional shape, in order to create games of lights and shadow on the surface: the elements seem to arise from the floor and to carry on the wall covering.<br>Triangle is obtain by press in special 3D mold, then glazed and assembled on net. This allow to use Triangle also on concave or convex curved surfaces. |
| use                  | Wall – indoor  |
| complementary pieces | Terminal Extra Small, Small and Large in all colors and finishing.<br>Listello in all colors and finishing.  |
| awards               | Archiproducts Design Award 2016  |
| patents              | Registered design n° 002889055-0019/0024 – date of registration: 03/12/2015  |
| category             | Triangle BIII UNI EN 14411 GL  |

## TRANGLE SMALL



5 pcs 12".1".1"  
on net 7".12"

## Laying and maintenance tips


|                                     |   |
|-------------------------------------|---|
| use                                 | Wall – indoor.  |
| installation                        | Lay on perfectly flat, dry walls.   |
| recommended adhesive                | NON-RAPID-DRYING adhesive for porcelain stoneware to make it easier to fix the sheets.  |
| recommended joints                  | Place the sheets with the same joint as within the sheet.   |
| recommended fillers                 | FINE-GRAIN CEMENT BASE GROUT: Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely.<br>EPOXY GROUT: Grout 0.5 m <sup>2</sup> at a time and wash thoroughly with clean water. Remove all traces of grout carefully before it dries completely. Do not use for Triangle Vert and Triangle Brun.   |
| cleaning at the end of installation | – Triangle Vert and Triangle Brun: do not use abrasive cleaners / do not use acid or alkaline products. / Craquelé is a type of glazed ceramics characterised by micro-cracks on the surface, deliberately created as a distinctive finish. This particular process makes the material sensitive to acids. For ordinary maintenance, anti-limescale products should be avoided, because they can dull the surface.<br><br>Please proceed as follows:<br>1. Treatment pre-grouting with FILA MP90, solvent based stain protector.<br>2. Grouting with cement-based grout, possibly do not grout in contrast<br>3. Cleaning at the end of installation with cleaner FILA CLEANER PRO, neutral detergent, dilute the product in a ratio 1:30<br>4. Final cleaning with FILA MP90<br><br>– Triangle Matt and Glossy: do not use abrasive cleaners, especially for glossy finishing.<br>FINE-GRAIN CEMENT BASE GROUT: Buffered acid (e.g. Deterdek by FILA, Deltaplus by KERAKOLL, or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 5 minutes then use a white scotch brite pad and rinse well with clean water. EPOXY GROUT: Alkaline detergent (e.g. Fugasoap by KERAKOLL, PS/87 by FILA). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 5 minutes then use a white scotch brite pad and rinse well with clean water. SILICONE: Solvent for silicone (e.g. Remosil). Pour it straight onto the stain, wait for 1-2 minutes and remove the mark using scotch brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable. |
| general cleaning (installed tiles)  | Triangle Vert and Triangle Brun: do not use abrasive cleaners / do not use acid or alkaline products<br>For ordinary maintenance, anti-limescale products should be avoided, because they can dull the surface.<br>Triangle Matt and Glossy: do not use abrasive cleaners, especially for glossy finishing  |
| calibers (real size)                | –   |

## Colors


### TRIANGLE SMALL – GLOSSY



Blanc



Brun



Vert


### TRIANGLE SMALL – MATT



White



Red



Green

## Technical features

| STANDARD                       | FEATURES                     | VALUE REQUIRED | ROMBINI TRIANGLE      |
|--------------------------------|------------------------------|----------------|-----------------------|
| ISO 10545/3                    | water absorption             | x >10%         | 17,0%                 |
| ISO 10545/9                    | thermal shock resistance     | no alteration  | no alteration         |
| ISO 10545/11                   | crazing resistance           | no alteration  | no alteration         |
| ISO 10545/13                   | acids and alkalis resistance | min B          | A – B                 |
| ISO 10545/14                   | stains resistance            | class 3        | class 5               |
| LEED 4.1                       |                              | –              | 64% recycled material |
| <b>VOC Emission</b>            |                              |                |                       |
| <b>Declaration of Contents</b> |                              |                |                       |
| <b>SDS</b>                     |                              |                |                       |
| <b>BPD3</b>                    |                              |                |                       |
| <b>HPD</b>                     |                              |                |                       |

# Merchandising

Display A01

Boards A01

# Display A01

|                                  |   |
|----------------------------------|---|
| dimensions display A01           | overall space needed for full display A0: 53,1" · h 82,7" · 17,7"<br>dimensions 5 wall boards: 48,2" · h 38,5"<br>dimensions chest (inclusive of boards): 39,4" · h 41,3" · 17,7" |
| crate dimensions                 | 31,5" · 47,25" · h 39,4"  |
| total weight<br>(crate included) | 264.5 lbs   |
| description                      | wall display consisting of 5 wall boards, cleated on the back, and a chest containing 21 boards A01 one each stock item   |



# Boards A01

dimensions 12" · 13,8"

## KOSEI




Bone Storm Terra Grey Green Dark Grey

## ROMBINI TRIANGLE SMALL



Glossy Blanc Matt White Glossy Brun Matt Red Glossy Vert Matt Green

## PUNTO GLOSSY

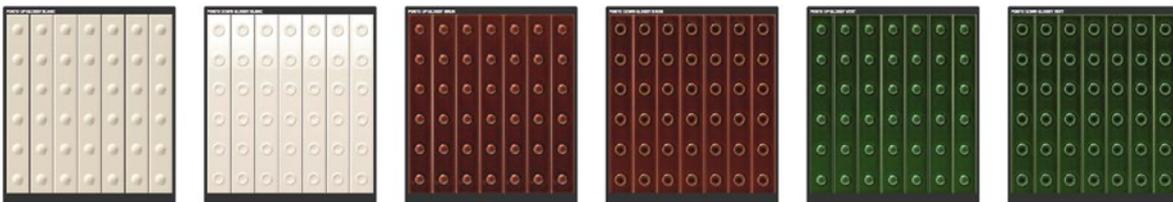

Up Blanc Down Blanc Up Brun Down Brun Up Vert Down Vert

## PHENOMENON



Air Bianco Air Nero Rain B Bianco Rain B Nero

## Boards back Graphics

### KOSEI



### ROMBINI



### PUNTO



### PHENOMENON



## CREDITS

Text: Mutina

Photography: Studio Bouroullec,  
Cristiano Casolari, DSL Studio, Officine Mimesi,  
Gerhardt Kellermann, Claudia Zalla.

Images: Officine Mimesi

All the rights are reserved.

Not any part of this work can be reproduced in any way  
without the preventive written authorization by Mutina.

All work is copyrighted © to their respective owners.

To discover more about Mutina  
collections visit [mutina.it](http://mutina.it)

Ceramiche Mutina Spa  
Via del Crociale 25  
41042 Fiorano Modenese, Italia  
T +39 0536812800  
F +39 0536812808  
[info@mutina.it](mailto:info@mutina.it)  
[www.mutina.it](http://www.mutina.it)

© Mutina 2023

**Mutina**